

PHYSICAL DATA

FEATURES

- Material: Aluminium alloy with acoustic polyester fibre covering
- The COLOR is made from sound-absorbing fabric that is flame retardant, non-toxic and non-irritating
- This scalloped acoustic-pendant has an excellent optical system made up of polarized light cups and an upper polarized lens.
- This luminaire an excellent example of deep light control, the design of which reduces the UGR of the lamp and the overall

glare to the eyes, making it ideal for the office environment

OPTIONS & ACCESSORIES

- DALI, 1-10V dimming, light control, bluetooth and adjustable colour temperature options available





MOUNTING: Suspended

APPLICATION AREAS; Indoor, Commercial, Residential, Retail, Hospitality, Libraries, Conference Areas

TECHNICAL DATA

PHPL05551SL

LAMP	LED
TOTAL POWER (W)	30W
SYSTEM OUTPUT (LM)	3097LM
EFFICACY (LM/W)	102.5
CCT (K)	3000 / 4000 / 6000K
CRI (RA)	>80
BEAM ANGLE	40.3°
UGR	<18.0
OPERATING VOLTAGE-VAC	220-240V
FREQUENCY RANGE	50/60HZ
OPERATING TEMPERATURE °C	-25°C to 40°C
RATED LIFE (HRS)	30 000HRS
POWER FACTOR	0.932
DIMENSIONS	L:1100 x W:55 x H:400mm

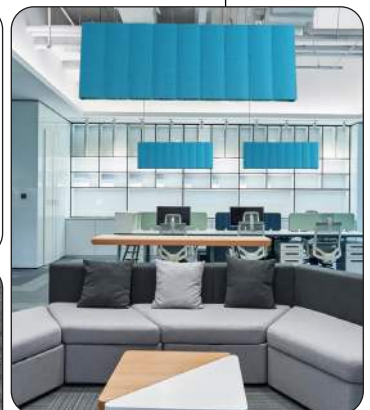

CD / KLM

- C0 - C180
- C90 - C270

E&OE MAY OCCUR

