




+ IP
20

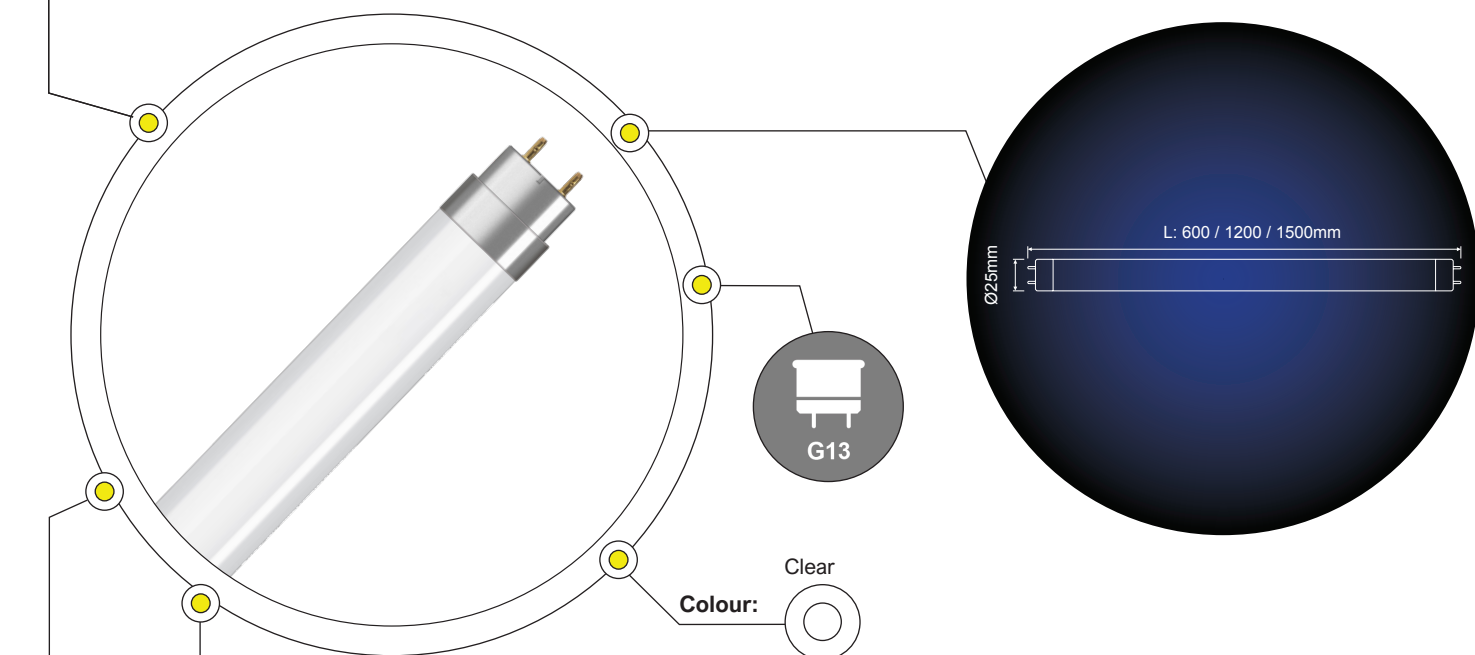

✓
1 YRS

PHYSICAL DATA

FEATURES

- Quick, simple and safe replacement to fluorescent T8 without rewiring
- Excellent color fidelity for a true lighting effect (Ra≥80)
- SDCM ≤6, provides excellent light quality
- Lower maintenance cost thanks to longer lifetime than traditional fluorescent

MOUNTING

as per lamp specifications

APPLICATION AREAS

Indoor, Outdoor, Commercial, Residential, Retail, Hospitality

TECHNICAL DATA

ST8E-0.6M 9W

ST8E-1.2M 18W

ST8E-1.5M 20W

LAMP BASE	LED G13	LED G13	LED G13
TOTAL POWER (W)	9W	18W	20W
SYSTEM OUTPUT (LM)	855 / 900 / 900LM	1710 / 1800 / 1800LM	2000LM
CCT (K)	3000 / 4000 / 6500K	3000 / 4000 / 6500K	4000 / 6500K
CRI (Ra)	80	80	80
BEAM ANGLE	160°	160°	160°
OPERATING VOLTAGE-VAC	220-240V	220-240V	220-240V
OPERATING TEMP °C	-20°C to 45°C	-20°C to 45°C	-20°C to 45°C
RATED LIFE (HRS)	15 000 HRS	15 000 HRS	15 000 HRS
POWER FACTOR	>0.5	>0.5	>0.5
MACADAM STEP	≤6	≤6	≤6
DIMENSIONS	D:φ25 x 600mm	D:φ25 x 1200mm	D:φ25 x 1500mm



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com

E&OE MAY OCCUR