

-  + IP 20
- 
-  LOA
-  3 YRS
- 

### PHYSICAL DATA

#### FEATURES

- Material: Steel and Silicone
- Driver: Turnable White - App
- The FILOLUCE is a unique art-piece, a true statement of modernity offers 360° diffused lighting
- The flexible tubular light is dimmed via a convenient APP and is voice APP supported
- Can be installed to create different shapes to suit various spaces using the accessories

#### OPTIONS & ACCESSORIES

- FILOLUCE W1 and W4 have wall mounted versions available
- DALI, TRIAC and 1-10V dimming options available on request
- Additional mounting accessories available

#### MOUNTING: Surface, Ceiling

#### APPLICATION AREAS

Indoor, Commercial, Residential, Hospitality, Retail, Museums, Galleries, Cultural Centres

### TECHNICAL DATA

	LF331819AP	LF331919AP
TOTAL POWER (W)	86W	90W
CCT (K)	2700 - 4700K	RGB
CRI (Ra)	90	90
BEAM ANGLE	180°	180°
OPERATING VOLTAGE-VAC	24V / 48V	24V / 48V
DIMMING RANGE	15-100%	15-100%
DIMENSIONS		
TUBE	D:Ø22 x L:5000mm	D:φØ22 x L:5000mm
P-CONNECTOR	D:Ø26 x L:150 x D:Ø120mm	D:Ø26 x L:150 x D:Ø120mm
POLE	D:Ø28 x L:658.5mm	D:Ø28 x L:658.5mm
P-END CONNECTOR	D:Ø26 x H:45mm	D:Ø26 x H:45mm




E&OE MAY OCCUR








FILOLUCE P CONNECTOR  
LF003063

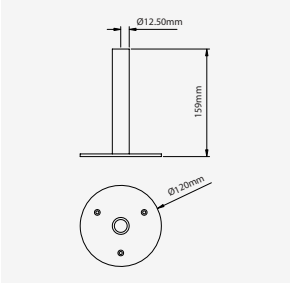


FILOLUCE POLE  
LF003065

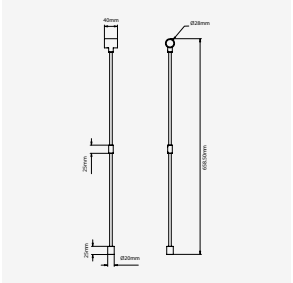



FILOLUCE P END  
LF003064

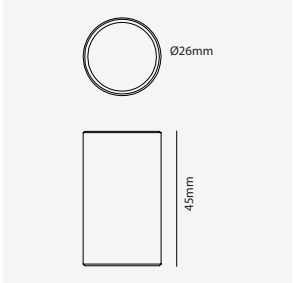

FILOLUCE STRIP RGB  
LF003067

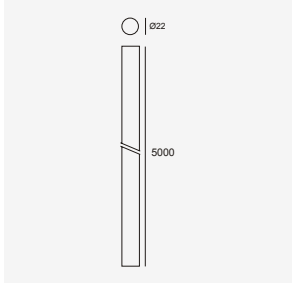

FILOLUCE STRIP W  
LF003086

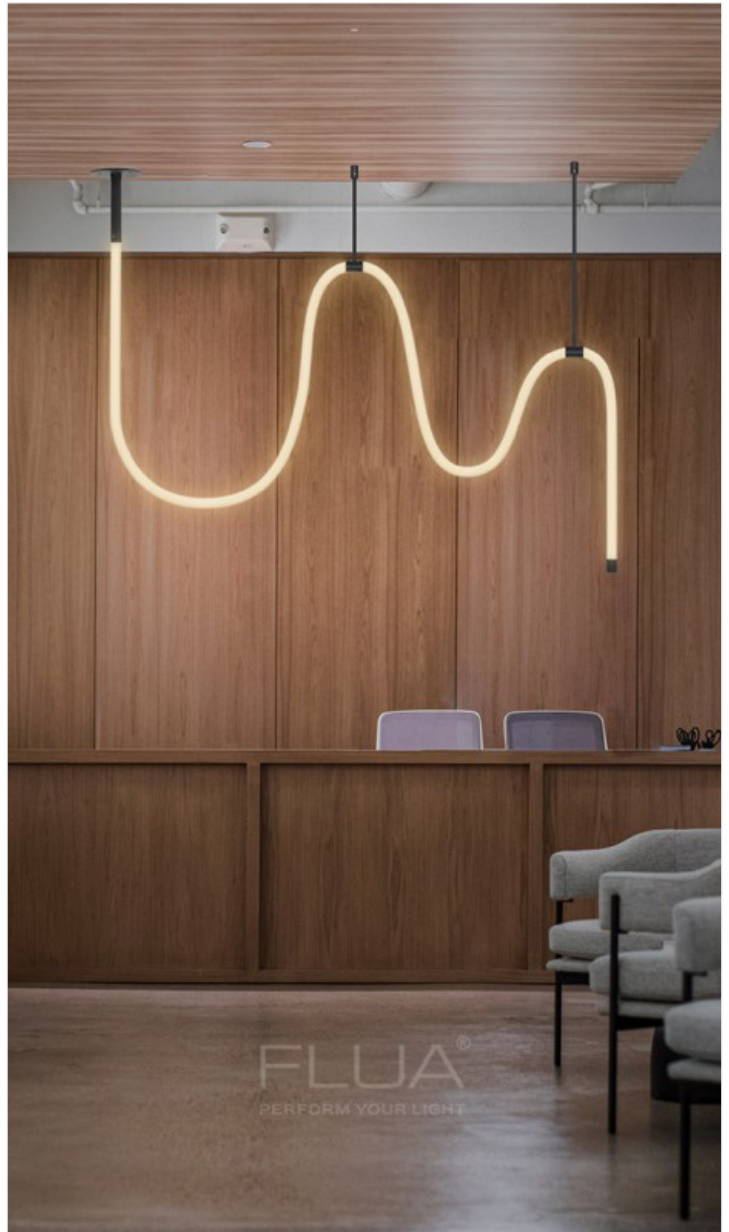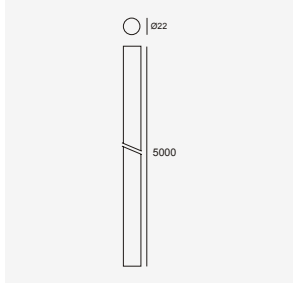

E&OE MAY OCCUR

