




+IP
20

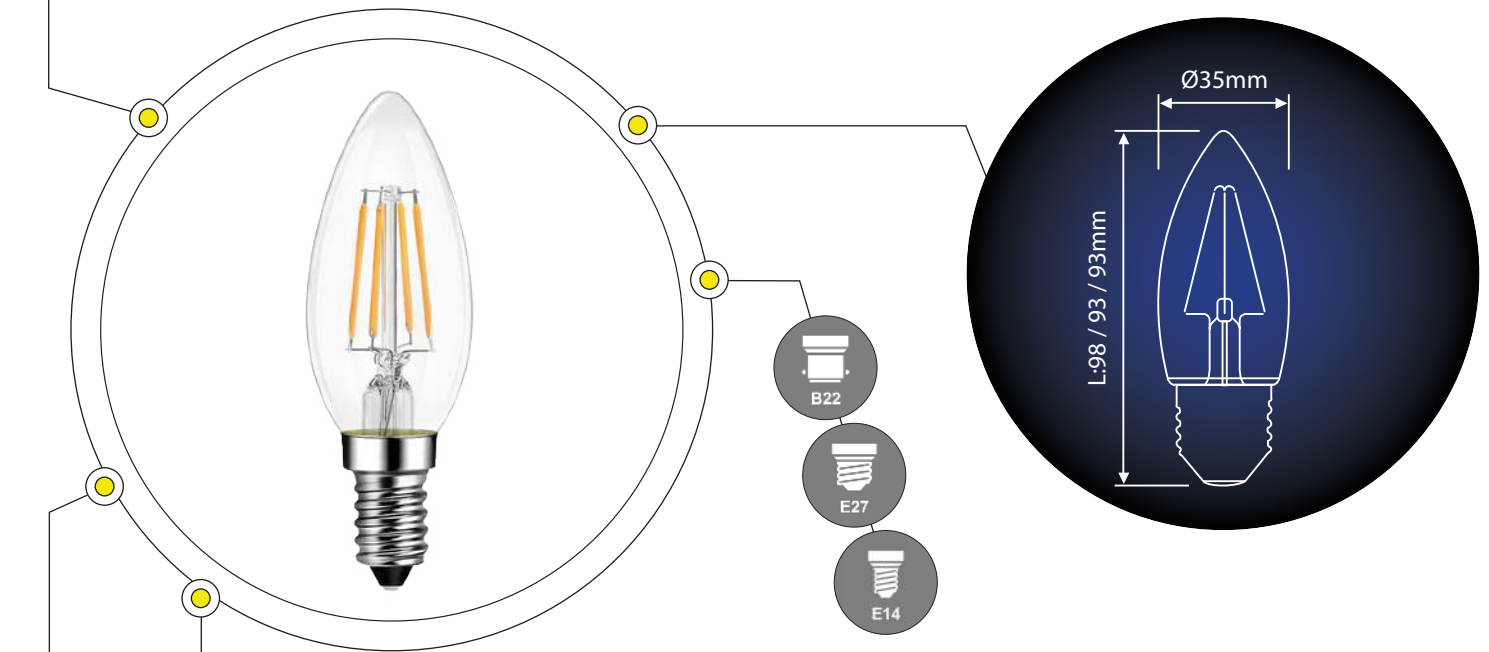

✓
2 YRS

PHYSICAL DATA

FEATURES

- Dimmable LED clear filament candle
- Please ensure that the minimum load requirement of each respective dimmer is adhered to
- Ensure the dimming module is compatible with the lamp

OPTIONS & ACCESSORIES

- Base available for selection: B22, E27 and E14
- Dimmer modules available:
LED Trailing Edge Rotary Dimmer

LED Trailing Edge Push Button Dimmer

MOUNTING

as per lamp specifications

APPLICATION AREAS

Indoor, Commercial, Residential, Retail, Hospitality

TECHNICAL DATA

G639SES

G639ES

G639BC

LAMP	LED	LED	LED
DIMMABLE	YES	YES	YES
BASE	E14	E27	B22
TOTAL POWER (W)	4W	4W	4W
SYSTEM OUTPUT (LM)	400LM	400LM	400LM
CCT (K)	3000K	3000K	3000K
CRI (RA)	80	80	80
BEAM ANGLE	350°	350°	350°
OPERATING VOLTAGE-VAC	230V	230V	230V
RATED LIFE (HRS)	15 000HRS	15 000HRS	15 000HRS
DIMENSIONS	D:φ35 X H:98mm	D:φ35 X H:93mm	D:φ35 X H:93mm

SHUTTLE DIM DATA

SDIM-L-LED-125/500

TYPE	BELL PRESS DIMMER
DIMMING METHOD	LEADING OR TRAILING EDGE
MIN LOAD POWER	125W and 500W
DIMENSIONS	125W: 36 x 36 x 12mm 500W: 42 x 42 x 13mm



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com

E&OE MAY OCCUR