

+ IP 55



5 YRS

PHYSICAL DATA

FEATURES

- Material: Flame retardant ABS
- A low profile, flush mounted presence detector that is easy to set up via an infrared handset (GEFL-HS – sold separately), that provides auto on/auto off switching
- GEFL offers presence detection and Lux level sensing
- Adjustable via IR handset, adjustable lux and timer
- Switches any type of load, works with any type of lamp
- Integral power supply

OPTIONS & ACCESSORIES

- Sensor options include: GEFL-PB push button and GEFL-IR Infra-red for selection
- GEFL-HS, Infrared handset, available for sensor setup

MOUNTING

Recessed

APPLICATION AREAS

Indoor, Commercial, Residential, Retail, Hospitality


TECHNICAL DATA

GEFL

CONTROL METHOD	SENSING CONTROL
SUPPLY VOLTAGE AC	230VAC +/- 10%
SUPPLY FREQUENCY (HZ)	50HZ
POWER CONSUMPTION	
- TERMINAL CAPACITY	2.5mm ²
OPERATING TEMP °C	-10°C TO 35°C
HUMIDITY	5-95% non condensing
MAX LOADS	
- INCANDESCENT (INC)	8A
- FLUORESCENT (F)	4A
- COMPACT FLUORESCENT (CF)	3A
- LED LIGHTING	3A
- RESISTIVE HEATERS (RH)	8A
TIME-OUT RANGE	10s - 30m
WEIGHT (KG)	0.150KG
DIMENSIONS	D:φ76 x H:69mm
CUT OUT	D:φ64mm



Detection pattern

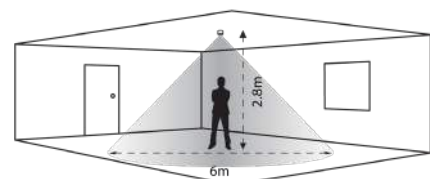

E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com