


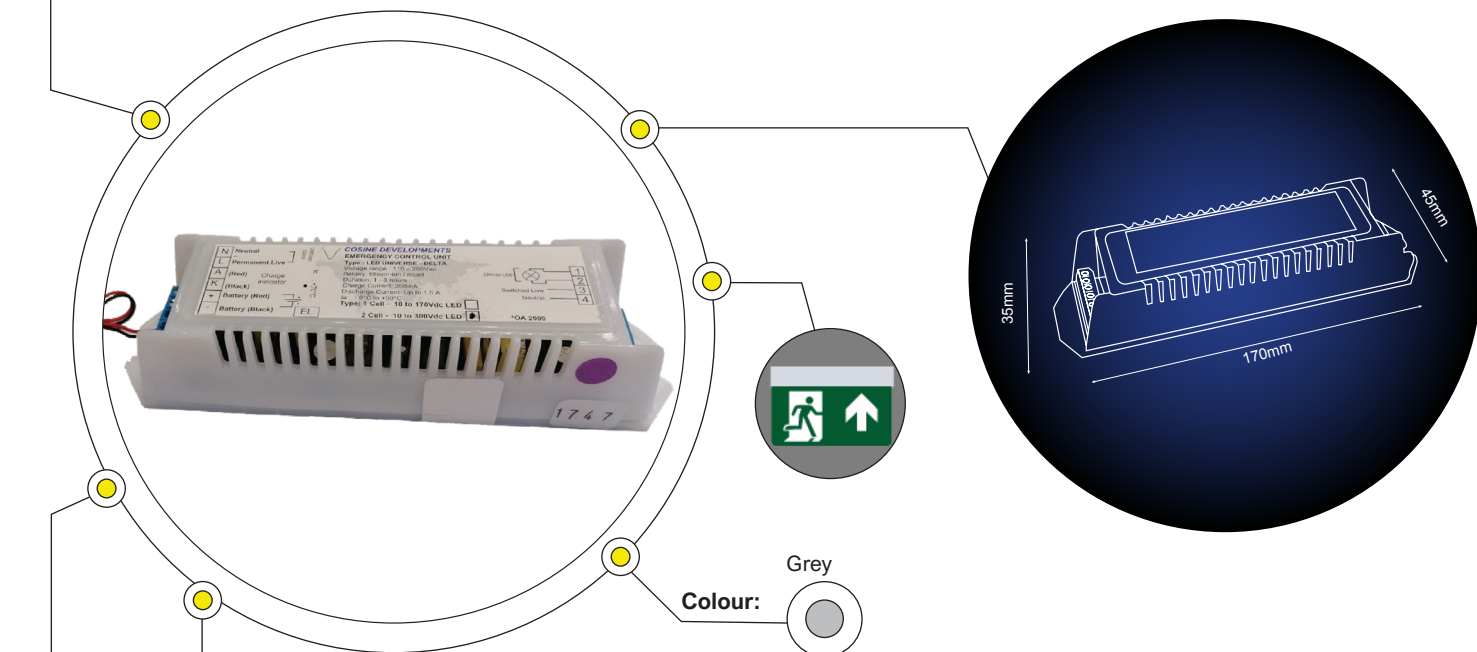

+ IP 20

✓
5 YRS

PHYSICAL DATA

FEATURES

- LED emergency kit for modules or panels with **onboard** drivers
- Ni-Cad and lithium-ion battery compatible
- It can operate LED's that has a forward voltage of 10 to 300Vdc with internal circuits using low currents. Please note that loads must be tested for compatibility before use
- Lithium-ion batteries offer better efficiency for emergency lighting
- The LED Universe with lithium-ion batteries can offer longer duration emergency mode with an added advantage of being cost-efficient

OPTIONS & ACCESSORIES


- If the emergency control gear cannot fit into the luminaire, due to size or temperature, the emergency control gear can be supplied in a remote box
- Higher-capacity LED emergency gears available
- Plastic, Slim or Low-Profile Housing available for selection

MOUNTING: With LED Drivers (on-board / internal)**APPLICATION AREAS:** Indoor, Commercial, Residential, Hospitality, Retail

TECHNICAL DATA

LED UNIVERSE DELTA

RATED SUPPLY VOLTAGE	100-253VAC
MAINS FREQUENCY	50HZ
OUTPUT VOLTAGE RANGE	10-300V
DISCHARGE CURRENT	2A (max)
BATTERY CHARGING TIME	24H
AMBIENT TEMP °C (TA)	+55°C
MAX CASING TEMP °C	70°C
DIMENSIONS	L:170 x W:45 x H:35mm

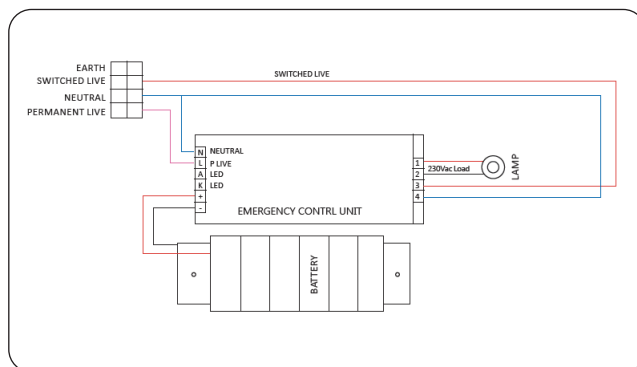

LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

E&OE MAY OCCUR

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com