
NIC M AD

RECESSED DOWNLIGHT

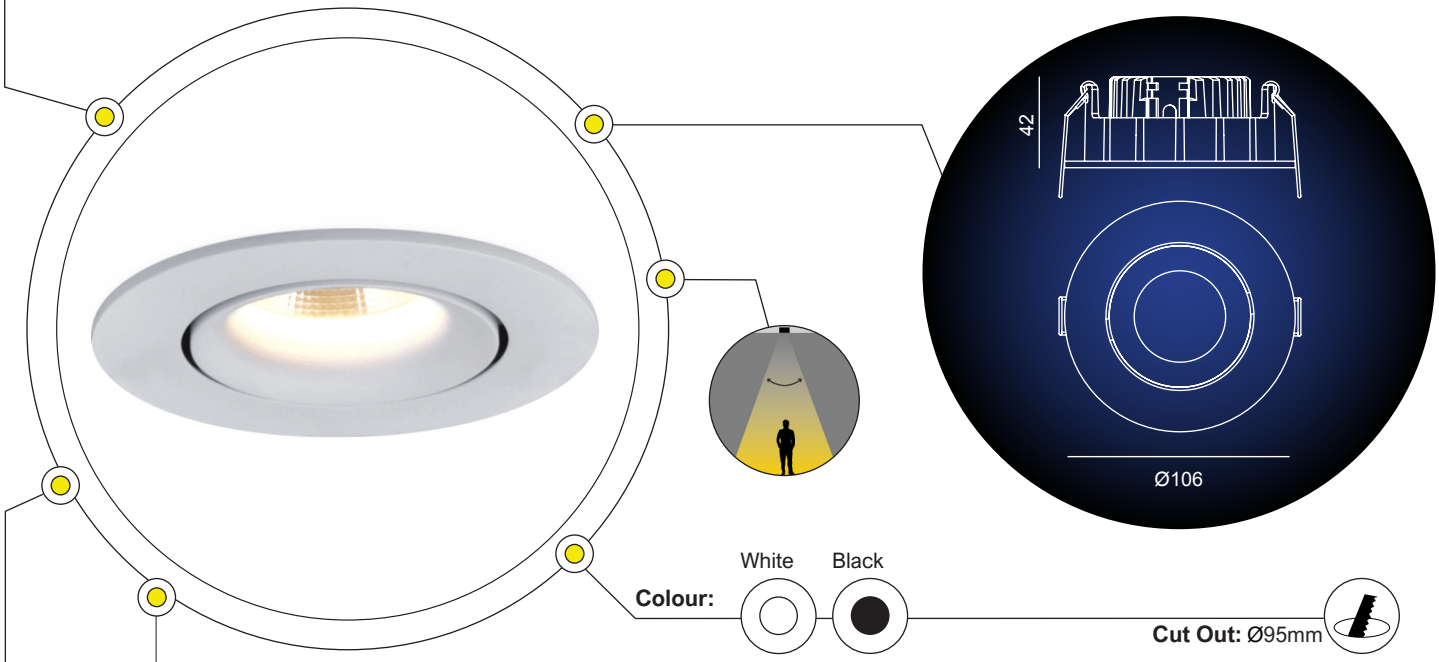

IP 20

LOA

3 YRS

PHYSICAL DATA

FEATURES
- Material: Aluminium
- The NIC is the most extensive product family in the FLUA collection, answering almost all your lighting requirements
- The range includes round and square, recessed, round surface lights, adjustable and fixed options as well as square and rectangular plates allowing one to mount the NIC in a series of either one, two or three downlights
- Adjustable

OPTIONS & ACCESSORIES
- DALI, TRIAC DIM, Dim 01/-10V dimming available
- Square version available


MOUNTING
Recessed

APPLICATION AREAS
Indoor, Commercial, Residential, Hospitality, Retail

TECHNICAL DATA — LF138012EDTW


LAMP	LED
TOTAL POWER (W)	11W
SYSTEM OUTPUT (LM)	698LM
CCT (K)	3000K
CRI (Ra)	90
BEAM ANGLE	31° / 23° / 47°
OPERATING VOLTAGE-VAC	220-240V
CURRENT (MA)	500MA
FLICKER FACTOR	102.74HZ / 0.55%
WEIGHT	0.23KG
DIMENSIONS	D:Ø106 x H:42mm
CUT OUT	D:Ø95mm



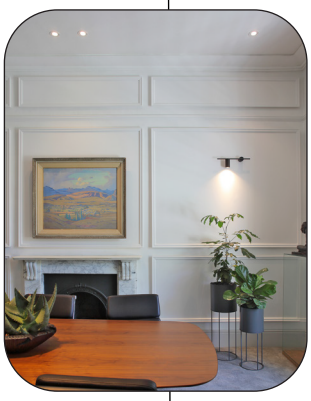

Project: leinster Hall

31° BEAM ANGLE



CD / KLM
- C0 - C180
- C90 - C270

E&OE MAY occur

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com