




+ IP 20



LOA

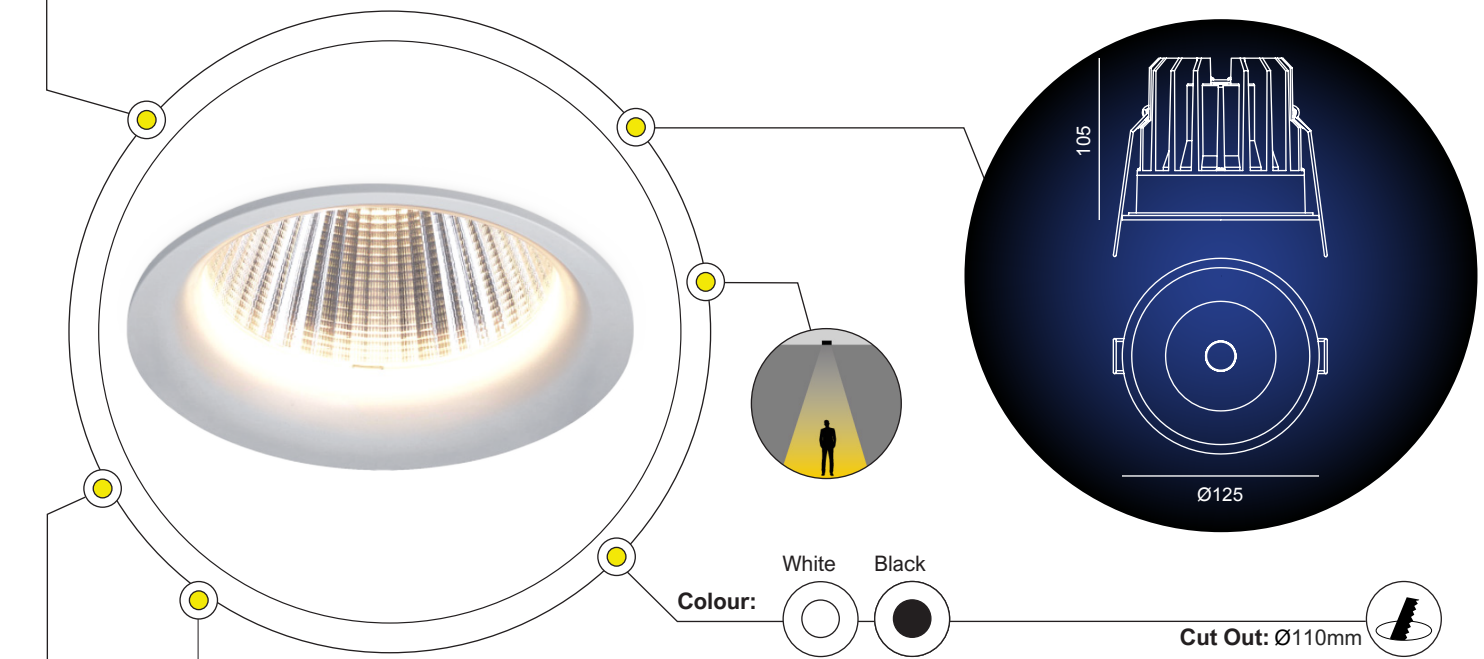

ldt

PHYSICAL DATA

FEATURES

- Material: Aluminium
- The NIC is the most extensive product family in the FLUA collection, answering almost all your lighting requirements
- The range includes round and square, recessed, round surface lights, adjustable and fixed options as well as square and rectangular plates allowing one to mount the NIC in a series one, two or three

OPTIONS & ACCESSORIES

- DALI, TRIAC and DIM 0/1-10V dimming options for selection

MOUNTING

Recessed



APPLICATION AREAS

Indoor, Commercial, Residential, Hospitality, Retail

TECHNICAL DATA


LF196015AW4K

LAMP	LED
TOTAL POWER (W)	42W
SYSTEM OUTPUT (LM)	2973LM
CCT (K)	4000K
CRI (Ra)	90
BEAM ANGLE	26° / 38°
OPERATING VOLTAGE-VAC	220-240V
CURRENT (MA)	1050MA
WEIGHT (KG)	0.63KG
DIMENSIONS	D:Ø125 x H:105mm
CUT OUT	D:Ø110mm

NIC L SINGLE PLATE
LF000621NIC L DOUBLE PLATE
LF000622

CD / KLM

- C0 - C180
- C90 - C270



E&OE MAY OCCUR



LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY