

+ IP 65



LOA

5 YRS

ldt

PHYSICAL DATA

FEATURES

- Material: Aluminium
- The DANAS comes in either a round or a square shaped option.
- The outer frames have a uniquely shaped holes that create unique lighting patterns on the floor.
- A plastic box is provided specifically for the installation into cement walls and include mounting clips for mounting inside wooden walls
- Flexible mounting method
- Housing iBox available seperately (LF000069)

OPTIONS & ACCESSORIES

- Round and Square options available
- Housing iBox available for selection (LF000069)

MOUNTING

Recessed



APPLICATION AREAS

Indoor, Commercial, Residential, Hospitality, Retail

TECHNICAL DATA

LF408611AB

TOTAL POWER (W)	4W
SYSTEM OUTPUT (LM)	27LM
CCT (K)	3000K
CRI (Ra)	80
BEAM ANGLE	C(71*26-33°)
OPERATING VOLTAGE-VAC	100-240V
CURRENT (MA)	700MA
HOUSING DIMENSIONS	D:Ø70 x H:42mm
DIMENSIONS	D:Ø55 x H:42mm
CUT OUT	D:Ø40 / D:Ø70

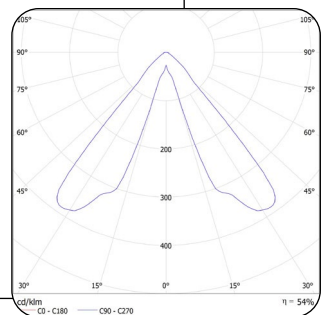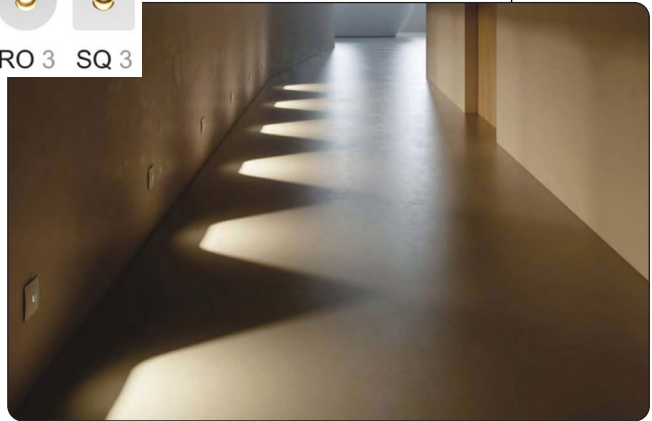

- C0 - C180
- C90 - C270

E&OE MAY OCCUR



LIGHTS BY
LINEA
EST. 1990

DESIGN & TECHNICAL CERTAINTY