

- + IP 20
- 5 YRS
- ldt

### PHYSICAL DATA

#### FEATURES

- ABS Body
- Acrylic - frosted with 80% transmission or prismatic clear with 90% transmission
- Floating External Control Gear

#### MOUNTING

Recessed

#### APPLICATION AREAS

Indoor, Commercial, Retail


#### OPTIONS & ACCESSORIES

- Surface mount available
- Dimmable - Dali, 1-10V, DMX

### TECHNICAL DATA

### LLEDP03

LAMP	LED
TOTAL POWER (W)	30 / 42W
SYSTEM OUTPUT (LM)	3870LM / 5418LM
EFFICACY (LM/W)	129
CCT (K)	3000K / 4000K / 5000K
CRI (RA)	80
BEAM ANGLE	180°
OPERATING VOLTAGE-VAC	220-240V
OPERATING TEMP °C	-30°C to +55°C
RATED LIFE (HRS)	50 000HRS
R9 VALUE	0.9
MAC ADAM STEP	3 SDCM
DIMENSIONS	L:595 X W:595 X H:100mm

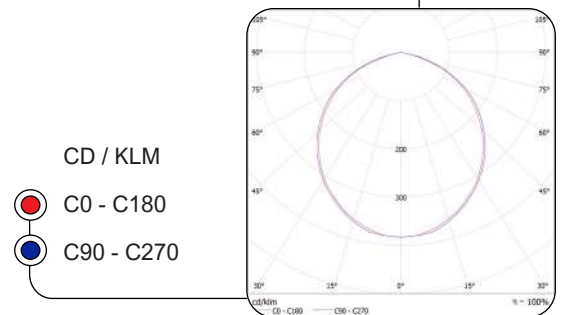

E&OE MAY OCCUR

