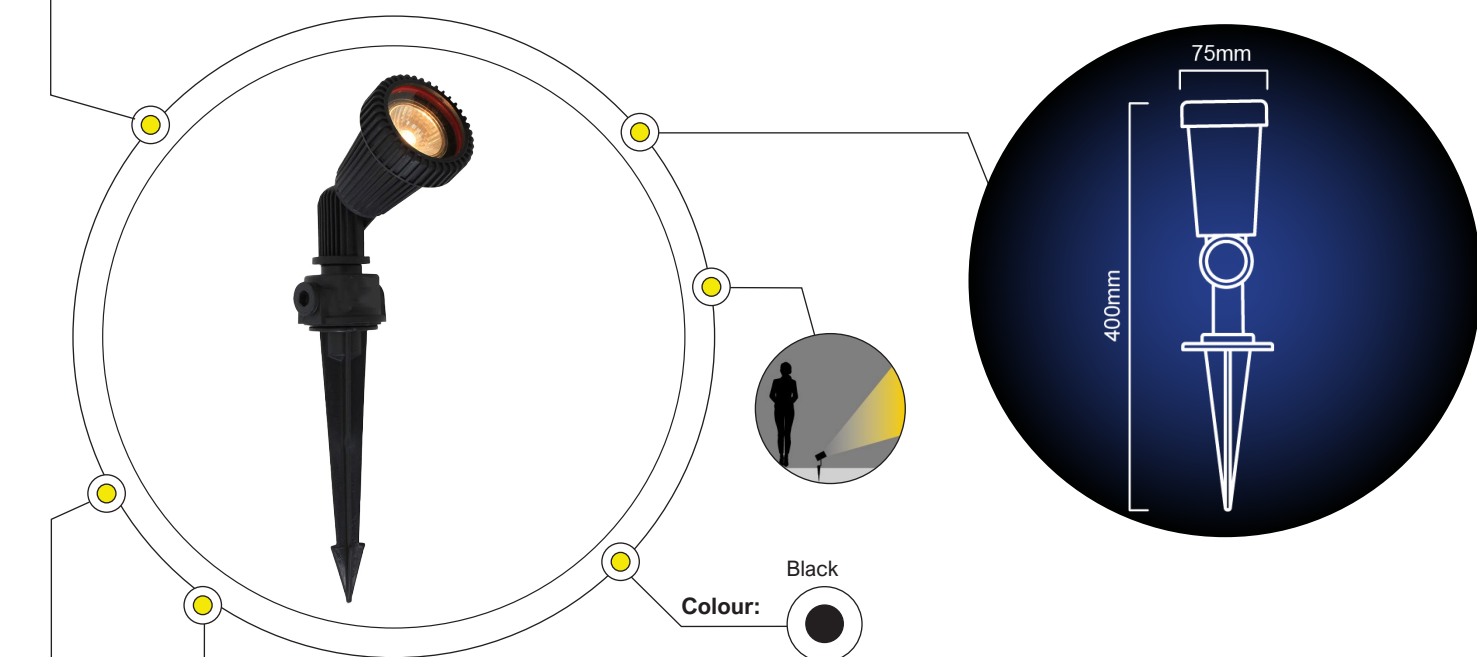


+ IP
54✓
1 YRS

PHYSICAL DATA

FEATURES

- Material: polycarbonate with clear tempered glass lens
- Includes spike
- Adjustable

MOUNTING

Surface, In-Ground

APPLICATION AREAS

Outdoor, Commercial, Residential, Retail, Hospitality

PLEASE NOTE

- LLEDS03 - Does not include transformer CO79 and CO76
- Lamp specifications and lamp warranties may differ

TECHNICAL DATA

VOLTAGE	220-240V (50/60Hz)	220-240V (50/60Hz)
LAMP HOLDER	GU10	GU5.3
	max 35W PAR16 230V	max 35W MR16 12V
DIAMETER	D: 75 x H:400mm	D: 75 x H:400mm

LLEDS02

LLEDS03

LAMP DATA

RDH5P030DU

LAMP	DELPHI LED
DIMMABLE	YES
BASE	GU10
TOTAL POWER (W)	5.9W
TOTAL OUTPUT (LM)	450LM
CCT (K)	3000K
CRI (RA)	80
RATED LIFE (HRS)	25 000HRS
OPERATING VOLTAGE	220-240V
OPERATING TEMP °C	-20°C to +40°C
DIMENSIONS	D: 50 x L:53.5mm

LAMP DATA

G947WW

LAMP	LED
DIMMABLE	NO
BASE	GU5.3
TOTAL POWER (W)	7W
TOTAL OUTPUT (LM)	525LM
CCT (K)	3000K
CRI (RA)	80
RATED LIFE (HRS)	25 000HRS
OPERATING VOLTAGE	220-240V
OPERATING TEMP °C	-20°C to +40°C
DIMENSIONS	D: 50 x L:53.5mm



LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

E&OE MAY OCCUR

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com