

+ IP 20



LOA

5 YRS

ldt

F

### PHYSICAL DATA

#### FEATURES

- Material: Aluminium and polycarbonate diffuser
- Anti-glare design
- Better heat dissipation with higher density aluminium alloy

#### OPTIONS & ACCESSORIES

- Flex and plug or direct connection options available
- TRIAC, 0-10V, Dali dimming options available

#### MOUNTING

Recessed

#### APPLICATION AREAS


Indoor, Commercial, Residential, Hospitality, Retail

### TECHNICAL DATA

LRD1132401331

TOTAL POWER (W)	3W x3
SYSTEM OUTPUT (LM)	507LM x3
EFFICACY (LM/W)	49
CCT (K)	3000K
CRI (Ra)	80
BEAM ANGLE	13°
OPERATING VOLTAGE-VAC	220-240V
OPERATING TEMP °C	-20°C TO 50°C
SOURCE POWER (W)	3 x 2W
SOURCE OUTPUT (LM)	609LM x3
CURRENT (MA)	700MA x3
RATED LIFE (HRS)	50 000 HRS
ILLUM @ 1M (LUX)	1334LX x3
FLICKER FACTOR	<4%
POWER FACTOR	≥0.9
R9 VALUE	11
UGR	<7
MAC ADAM STEP	3SDCM
DIMENSIONS	L:106 x W:44 x H:39mm
CUT OUT	99 x 38mm

### Single Beam

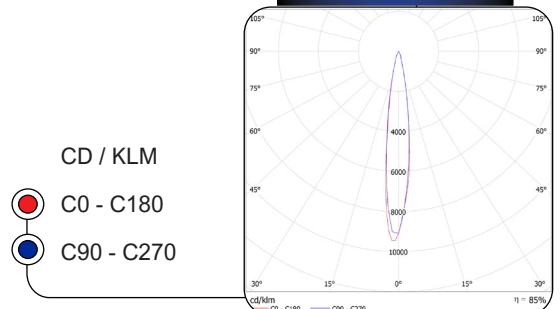

E&OE MAY OCCUR



**Lights By Linea**  
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116  
info@lightsbylinea.com | www.lightsbylinea.com