CIRCULAR PANEL LED 220mm

LED RECESSED DOWNLIGHTS

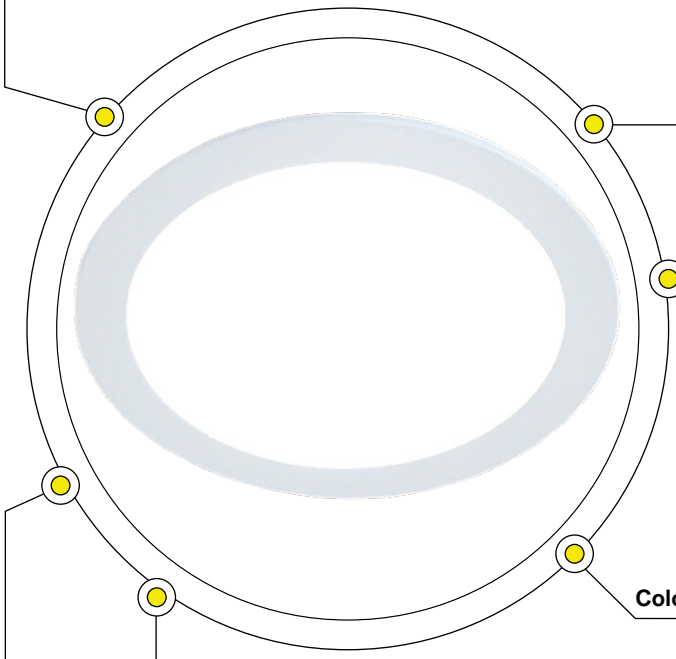



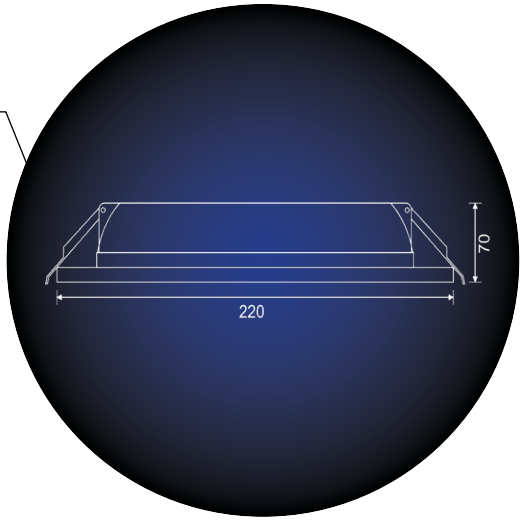

White

Colour:

Cut Out ϕ190mm

+IP 44

3 YRS

Idt

PHYSICAL DATA

FEATURES
- ABS Body
- Opal Acrylic Diffuser Lens
- Floating External Control Gear

OPTIONS & ACCESSORIES
- Surface mount available
- Dimmable - Dali, 1-10v, DMX

MOUNTING
Recessed

APPLICATION AREAS
Indoor, Commercial, Retail

TECHNICAL DATA — LRD34

LAMP	LED
TOTAL POWER (W)	24W
SYSTEM OUTPUT (LM)	3072LM
EFFICACY (LM/W)	128
CCT (K)	3000 / 4000K / 5000K
CRI (Ra)	80
BEAM ANGLE	WIDE BEAM
OPERATING VOLTAGE-VAC	230V 50HZ
OPERATING TEMP (C°)	-30°C TO 55°C
RATED LIFE (HRS)	50 000HRS
R9 VALUE	0,9+
MAC ADAM STEP	3 SDCM
DIMENSIONS	D:ϕ220 X H:70mm

cd/klm
- C0 - C180
- C90 - C270
- BEAM ANGLE



E&OE MAY OCCUR

Lights By Linea
Since (1990)
Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com