

PHYSICAL DATA

FEATURES

- Material: Aluminium and PMMA lens
- Can be connected seamlessly
- Non-dimmable

MOUNTING

Suspended (with suspension kits)



APPLICATION AREAS

Indoor, Commercial, Residential, Hospitality, Retail

TECHNICAL DATA

LSL0460

TOTAL POWER (W)	60W
SYSTEM OUTPUT (LM)	>6500LM
EFFICACY (LM/W)	>108
CCT (K)	3000 / 4000 / 6000K
CRI (Ra)	>80
BEAM ANGLE	30° / 60° / 90°
OPERATING VOLTAGE-VAC	220-240V
OPERATING TEMP °C	-20°C TO 40°C
CURRENT (MA)	1500MA
RATED LIFE (HRS)	50 000HRS
FLICKER FACTOR	FLICKER FREE
POWER FACTOR	>0.95
R9 VALUE	>0
UGR	<22
DIMENSIONS	L:1727 x W:62 x H:27mm

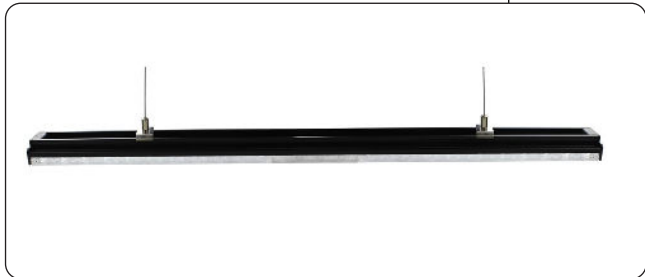

- CD / KLM
- C0 - C180
 - C90 - C270

E&OE MAY OCCUR

