


+IP
20

LOA

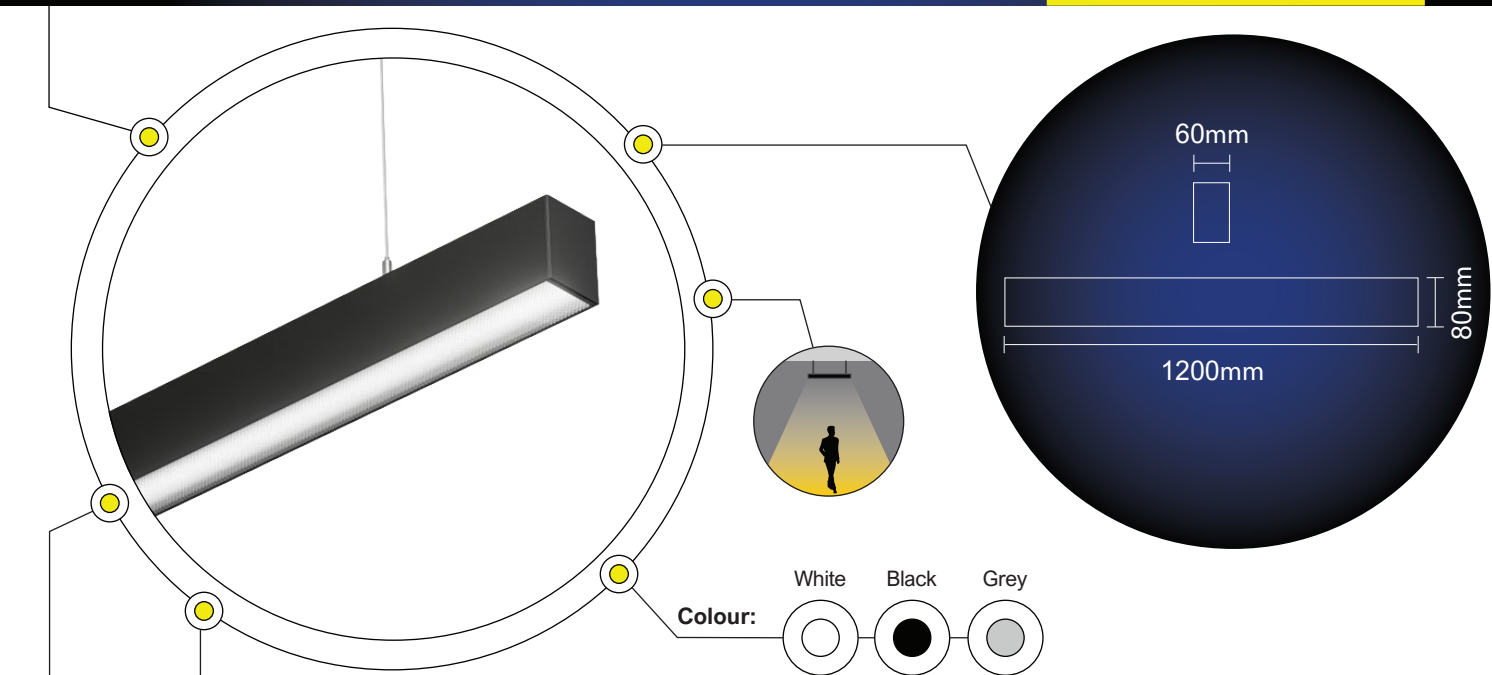

ldt

PHYSICAL DATA

FEATURES

- Material: Aluminum with PMMA diffuser
- Modular structure, easy for driver replacement
- 1.5mm Profile thickness
- Available in single and continuous linear, easy for connection & maintenance

OPTIONS & ACCESSORIES

- Dimming: On/Off DALI
- Magnetic uplight module
- Extra 2.4m rollable diffuser
- Available in 3 lengths: 1200mm / 1500mm / 3000mm

- Direct lighting wattages: 22W / 27W / 55W
- ID/DR lighting wattages: 32W / 40W / 80W
- Aluminum end cap

MOUNTING

Suspended


APPLICATION AREAS

Indoor, Commercial, Residential, Retail

TECHNICAL DATA

LSL08324030

LAMP	LED
TOTAL POWER (W)	32W
SYSTEM OUTPUT (LM)	4800LM
EFFICACY (LM/W)	150LM/W
CCT (K)	4000K
CRI (Ra)	90
BEAM ANGLE	110°
OPERATING VOLTAGE-VAC	220 - 240V
OPERATING TEMP °C	-20°C To 40°C
RATED LIFE (HRS)	50 000HRS L90B10
THD	<20%
MAC ADAM STEP	SDCM <3
WEIGHT (KG)	3.5KG
DIMENSIONS	W:60 x L:1200 x H:80mm

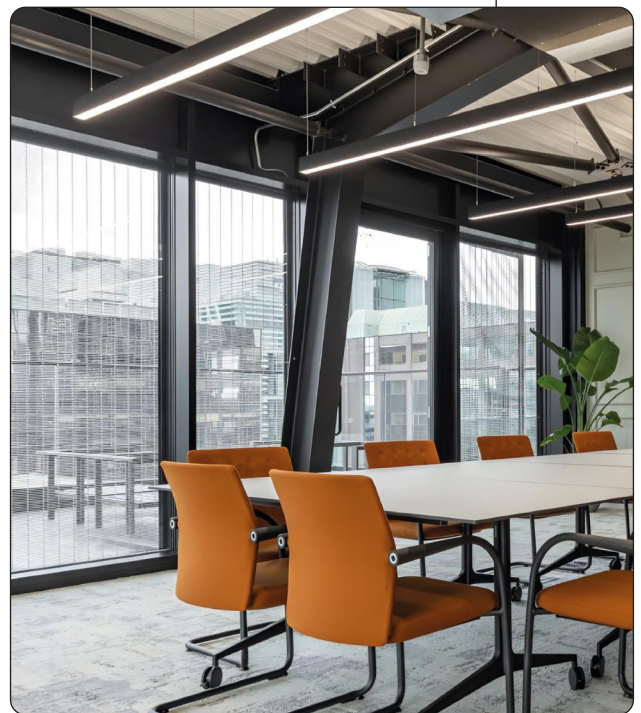

LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

E&OE MAY OCCUR

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com