




+IP
20



LOA

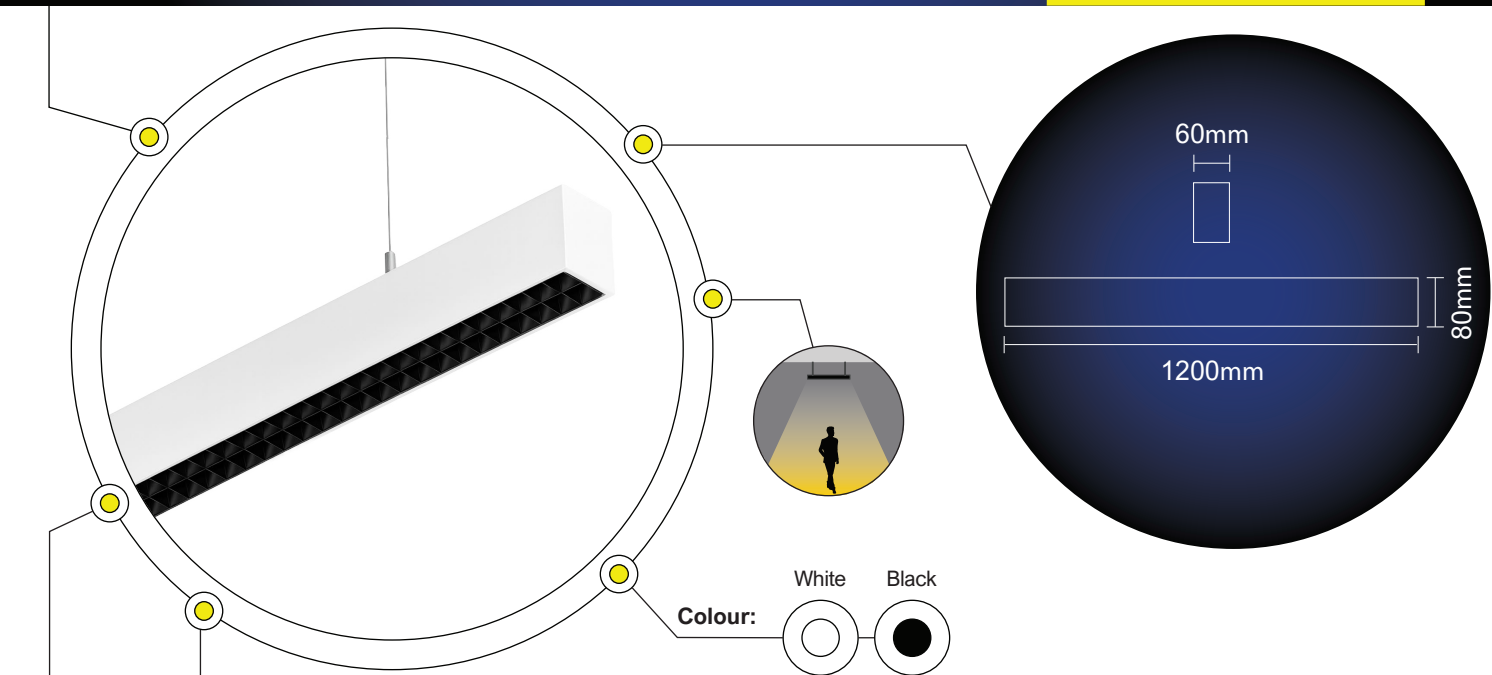

5 YRS

ldt

PHYSICAL DATA

FEATURES

- Material: Aluminum
- Modular structure, easy for driver replacement
- Available in single and continuous linear, easy connection and maintenance
- Efficacy: 120-130lm/W @white louvre & 110lm/W with a black louvre

OPTIONS & ACCESSORIES

- Dimming: On/Off DALI
- Suspension accessories & extra 2.4m rollable diffuser
- Available in 3 lengths: 1200mm / 1500mm / 3000mm
- Direct lighting wattages: 25W / 31W / 62W

- ID/DR lighting wattages: 38W / 46W / 92W
- Available as recessed, with trim for installation

MOUNTING

Suspended or Surface

APPLICATION AREAS

Indoor, Commercial, Schools, Banks, Retail, Offices with URG requirements

TECHNICAL DATA

LSL10324030

LAMP	LED
TOTAL POWER (W)	32W
SYSTEM OUTPUT (LM)	4000LM
EFFICACY (LM/W)	130LM/W
CCT (K)	4000K
CRI (Ra)	90
BEAM ANGLE	60°
RATED LIFE (HRS)	50 000HRS L90B10
UGR	<19
MAC ADAM STEP	SDCM <3
DIMENSIONS	W:60 x L:1200 x H:80mm



LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

E&OE MAY OCCUR

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com