LSL103

LINEAR LIGHTING

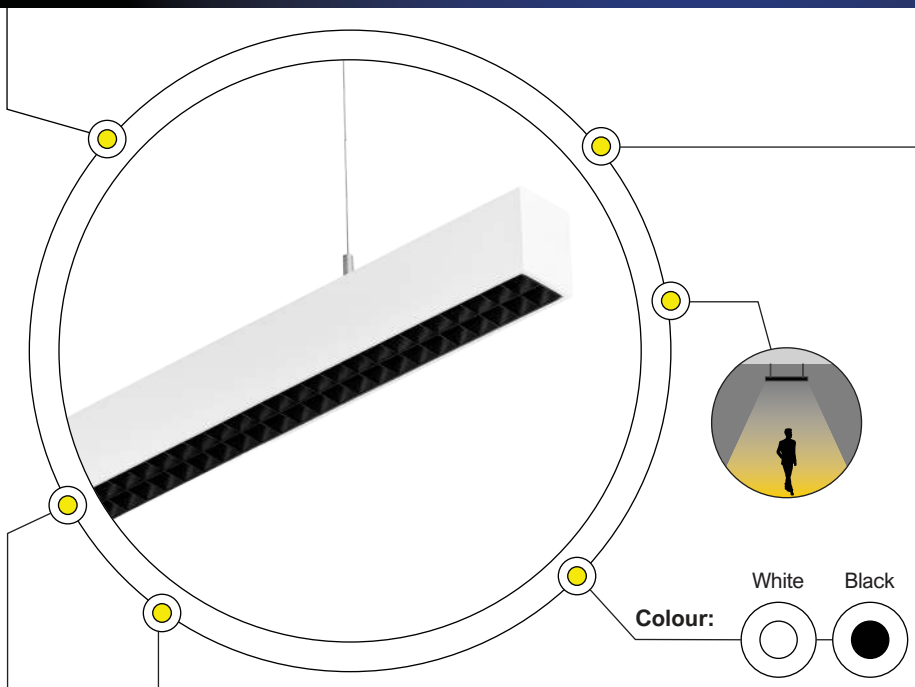

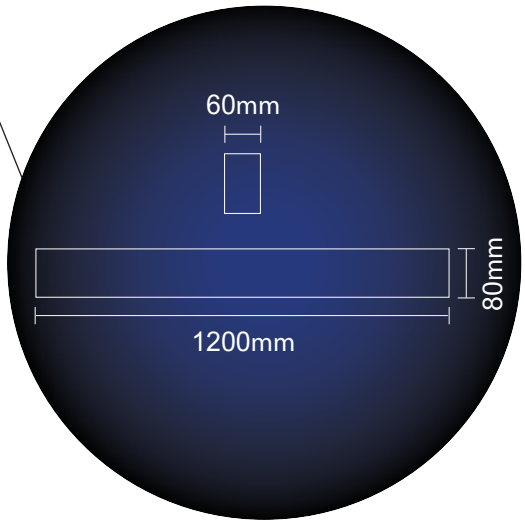

+ IP 20

LOA

5 YRS

ldt

PHYSICAL DATA

FEATURES

- Material: Aluminum
- CCT selectable
- Dimming: On/Off DALI
- Modular structure, easy for driver replacement
- Available in single and continous linear, easy connection and maintenance
- Efficacy: 120-130lm/W @white louvre & 110lm/W with a black louvre
- Magnetic uplight module

OPTIONS & ACCESSORIES

- Suspension accessories & extra 2.4m rollable diffuser
- Available in 3 lengths: 1200mm / 1500mm / 3000mm
- Direct lighting wattages: 25W / 31W / 62W
- Indirect lighting wattages: 38W / 46W / 92W
- Available as recessed, with trim for installation

MOUNTING

Suspended or Surface mounted

APPLICATION AREAS

Indoor, Commercial, Schools, Banks, Retail, Offices with URG requirements

TECHNICAL DATA

	LSL1032CCT31
LAMP	LED
TOTAL POWER (W)	32W
SYSTEM OUTPUT (LM)	4000LM
EFFICACY (LM/W)	130LM/W
CCT (K)	3000K / 4000K / 5000K
CRI (Ra)	90
BEAM ANGLE	60° DOWN | 120° UP
RATED LIFE (HRS)	50 000HRS L90B10
UGR	<19
MAC ADAM STEP	SDCM <3
DIMENSIONS	W:60 x L:1200 x H:80mm

E&OE MAY OCCUR

Lights by Linea
Since (1990)
Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com