




+IP
20



LOA

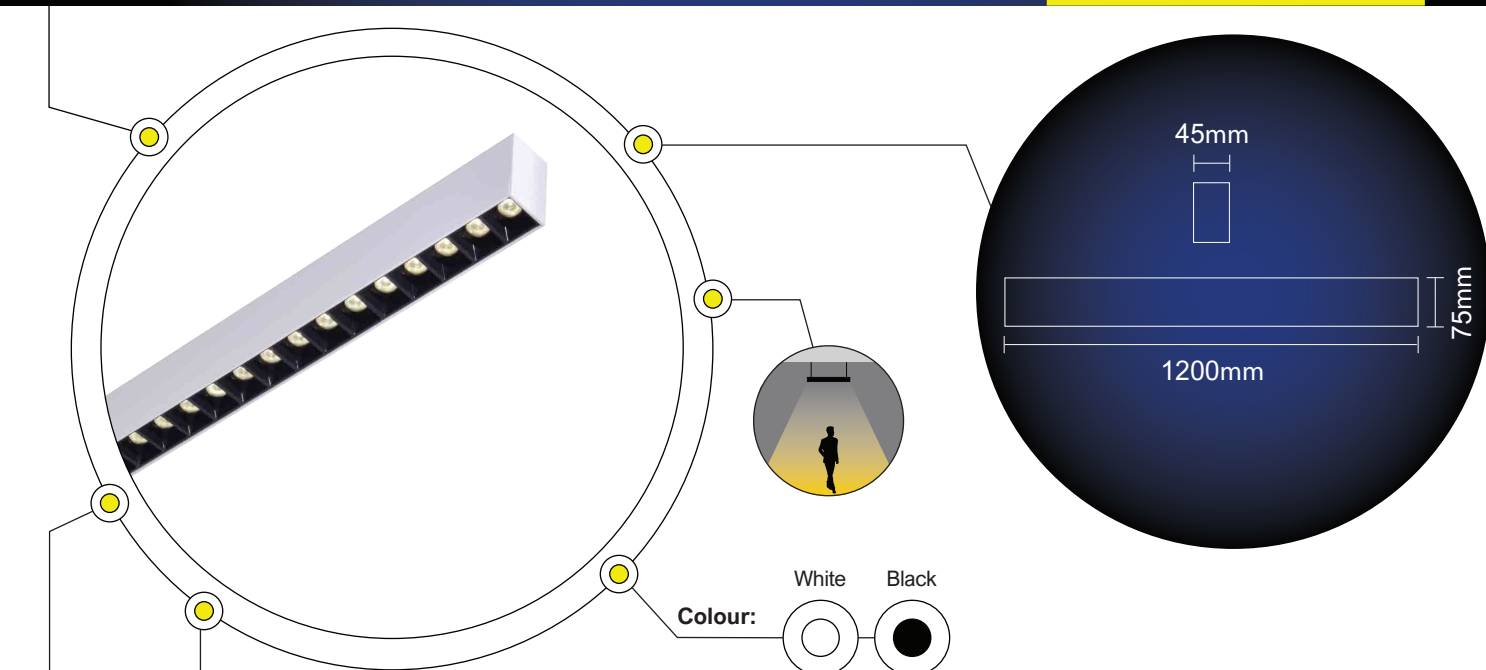

5 YRS

ldt

PHYSICAL DATA

FEATURES

- Material: Aluminum
- 3CCT selectable
- Dimming: On/off DALI
- Modular structure, easy for driver replacement
- Available in single and continuous linear
- Easy connection and maintenance

OPTIONS & ACCESSORIES

- Magnetic uplight module
- Suspension accessories and extra 2.4m rollable diffuser

- Available in 3 lengths: 1200mm / 1500mm / 3000mm
- Direct lighting wattages: 30W / 40W / 80W
- ID/DR lighting wattages: 40W / 50W / 100W

MOUNTING

Suspended and Surface mounted


APPLICATION AREAS

Indoor, Commercial, Banks, Schools, Offices, Retail

TECHNICAL DATA

LSL1140CCT31


LAMP	LED
TOTAL POWER (W)	40W
SYSTEM OUTPUT (LM)	5200LM
EFFICACY (LM/W)	130LM/W
CCT (K)	3000K / 3500K / 4000K
CRI (Ra)	90
BEAM ANGLE	60°
RATED LIFE (HRS)	50 000HRS L90B10
UGR	<19
MAC ADAM STEP	SDCM <3
DIMENSIONS	W:45 x L:1200 x H:75mm

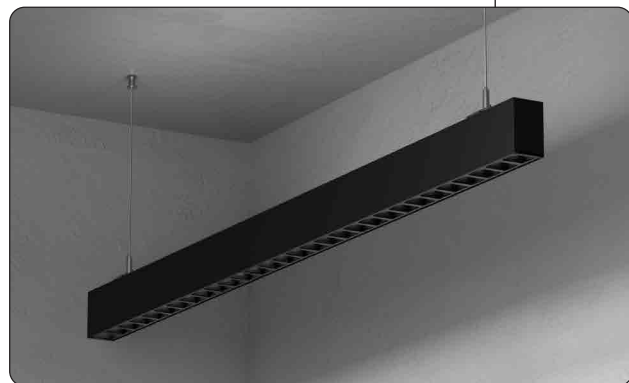

CD / KLM

C0 - C180

C90 - C270



E&OE MAY OCCUR



LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com