




+IP
20

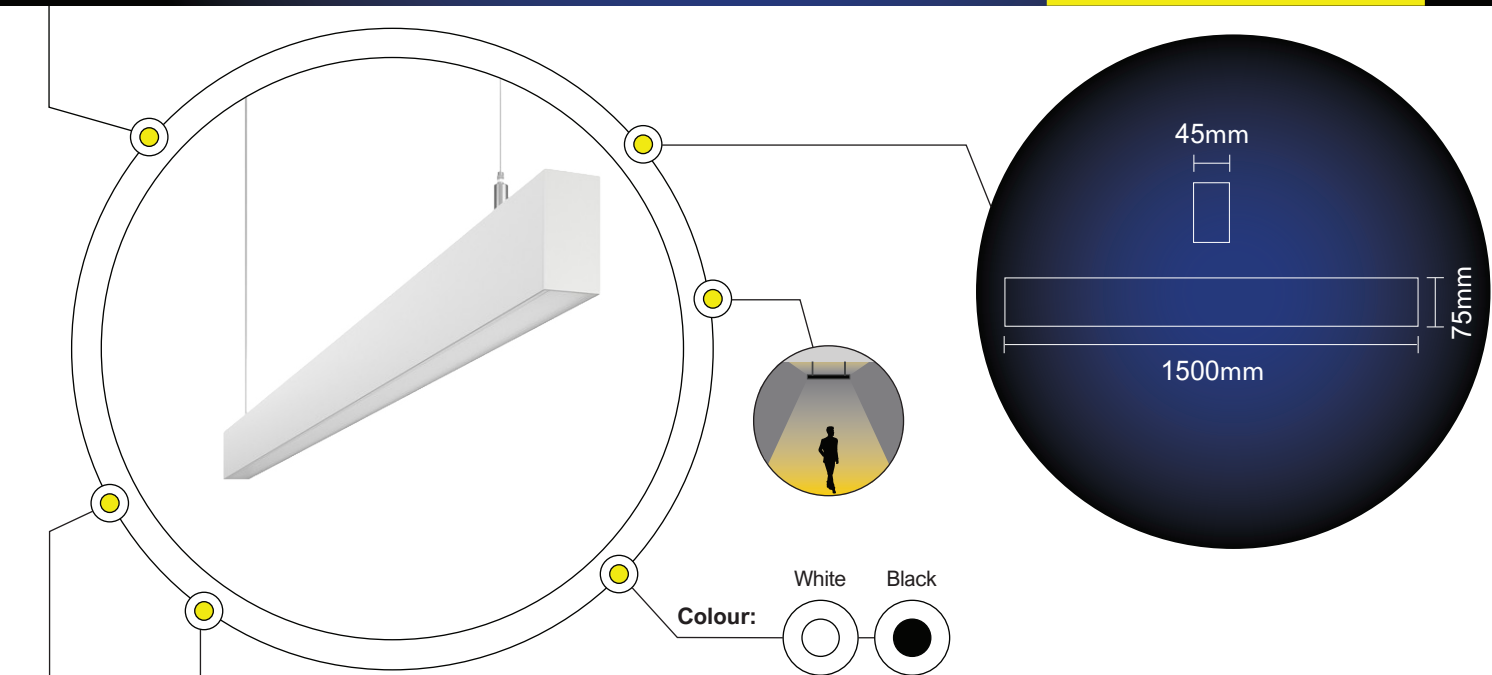

LOA

5 YRS

ldt

PHYSICAL DATA

FEATURES

- Material: Aluminum
- 2CCT Selectable
- Modular structure, easy for driver replacement
- Available in a single and continuous linear
- Easy for connection & maintenance
- Adjustable up/down light distribution ratio
- Beam angle: Opal 110° down | 120° up
MPD 9° down | 120° up, Brightview UGR film

OPTIONS & ACCESSORIES

- Suspension accessories
- Available in 3 lengths: 1200mm / 1500mm / 3000mm
- Direct lighting wattages: 30W / 40W / 80W
- Indirect lighting wattages: 40W / 50W / 100W
- Magnetic uplight module
- Dimming: On/Off DALI

MOUNTING: Surface and Suspended


APPLICATION AREAS: Indoor, Commercial, Offices, Banks, Schools, Retail

TECHNICAL DATA

LSL14502CCT


LAMP	LED
TOTAL POWER (W)	50W
SYSTEM OUTPUT (LM)	6500LM
EFFICACY (LM/W)	130LM/W
CCT (K)	3000K / 4000K
CRI (Ra)	90
BEAM ANGLE	110° DOWN / 120° UP
RATED LIFE (HRS)	50 000HRS L90B10
MAC ADAM STEP	SDCM <3
DIMENSIONS	W:45 x L:1500 x H:75mm

SELECTABLE UP/DOWN DISTRIBUTION

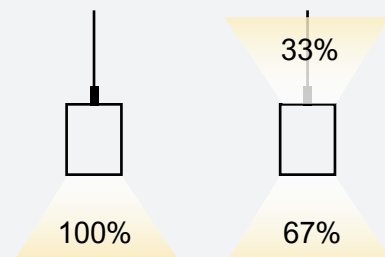

CD / KLM

- ☐ C0 - C180
- ☐ C90 - C270

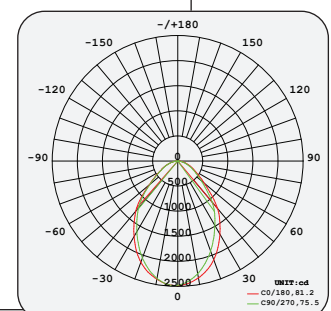

E&OE MAY OCCUR



LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com