


+IP
20

LOA

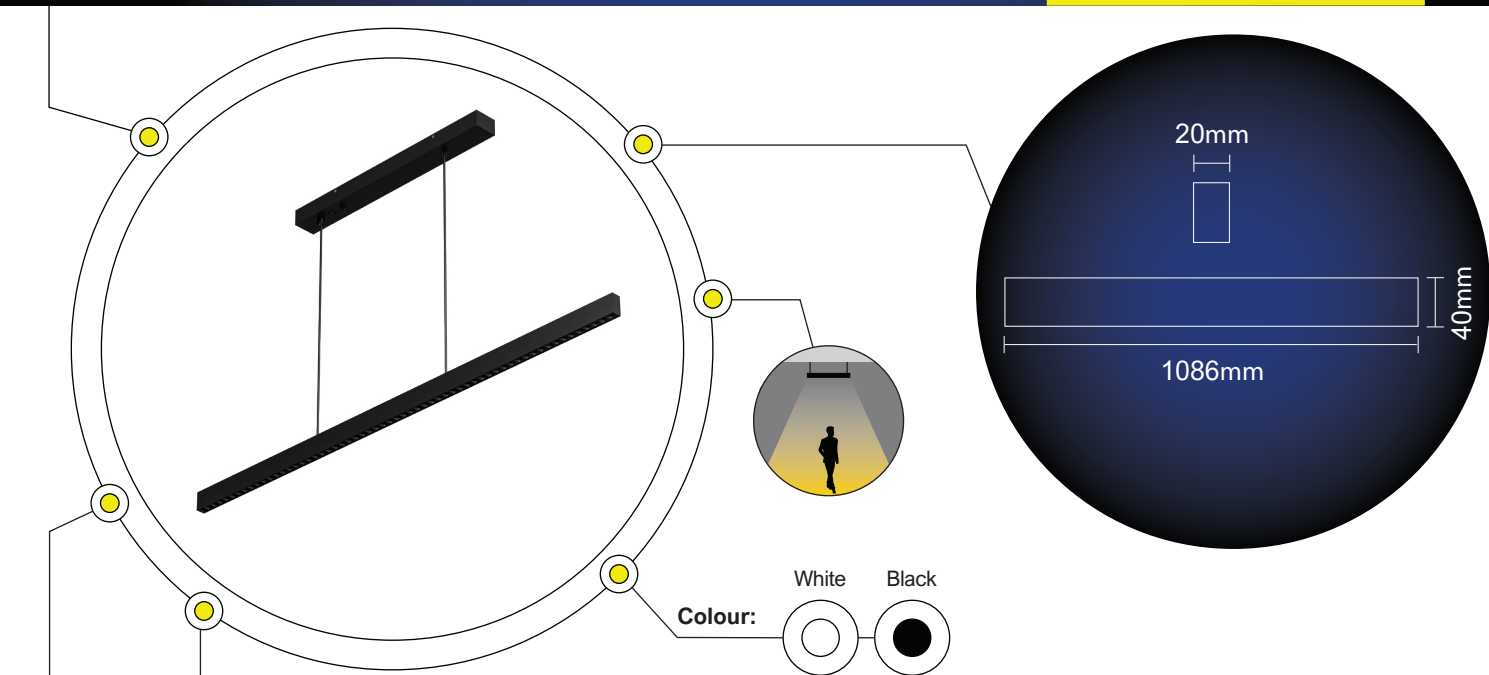

ldt

PHYSICAL DATA

FEATURES

- Material: Aluminum
- SAPP Ceiling
- Efficacy: 120-130lm/W @white louvre & 110lm/W with a black louvre
- Low glare (UGR <16)

OPTIONS & ACCESSORIES

- Dimming: On/Off Dali
- Suspension accessories
- KY public reflector
- Available in 4 lengths: 900mm / 1100mm / 1300mm / 1500mm

- Available in 4 wattages: 20W / 30W / 40W / 50W
- Fixed CCT: 3000K / 4000K / 5000K
- Silver lens reflector
- Available as a pendant, with adjustable height

MOUNTING

Suspended


APPLICATION AREAS

Indoor, Commercial, Offices, Retail

TECHNICAL DATA


LSL15304030

LAMP	LED
TOTAL POWER (W)	30W
SYSTEM OUTPUT (LM)	3600LM
EFFICACY (LM/W)	120 - 130LM/W
CCT (K)	4000K
CRI (Ra)	90
BEAM ANGLE	60°
RATED LIFE (HRS)	50 000HRS L90B10
UGR	<19
MAC ADAM STEP	SDCM <3
DIMENSIONS	W:20 x L:1086 x H:40mm

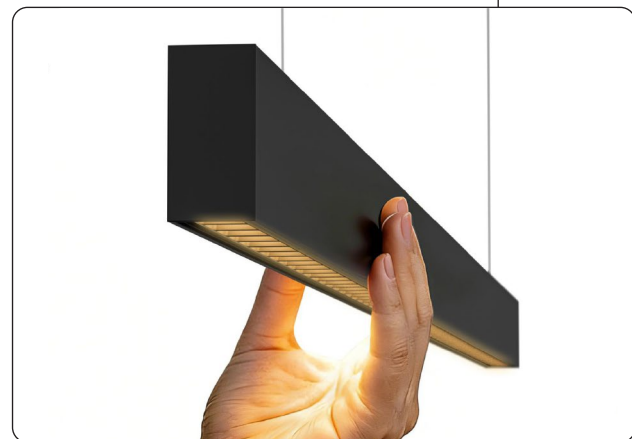

CD / KLM

- C0 - C180
- C90 - C270



E&OE MAY OCCUR



LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com