


+IP
20

LOA

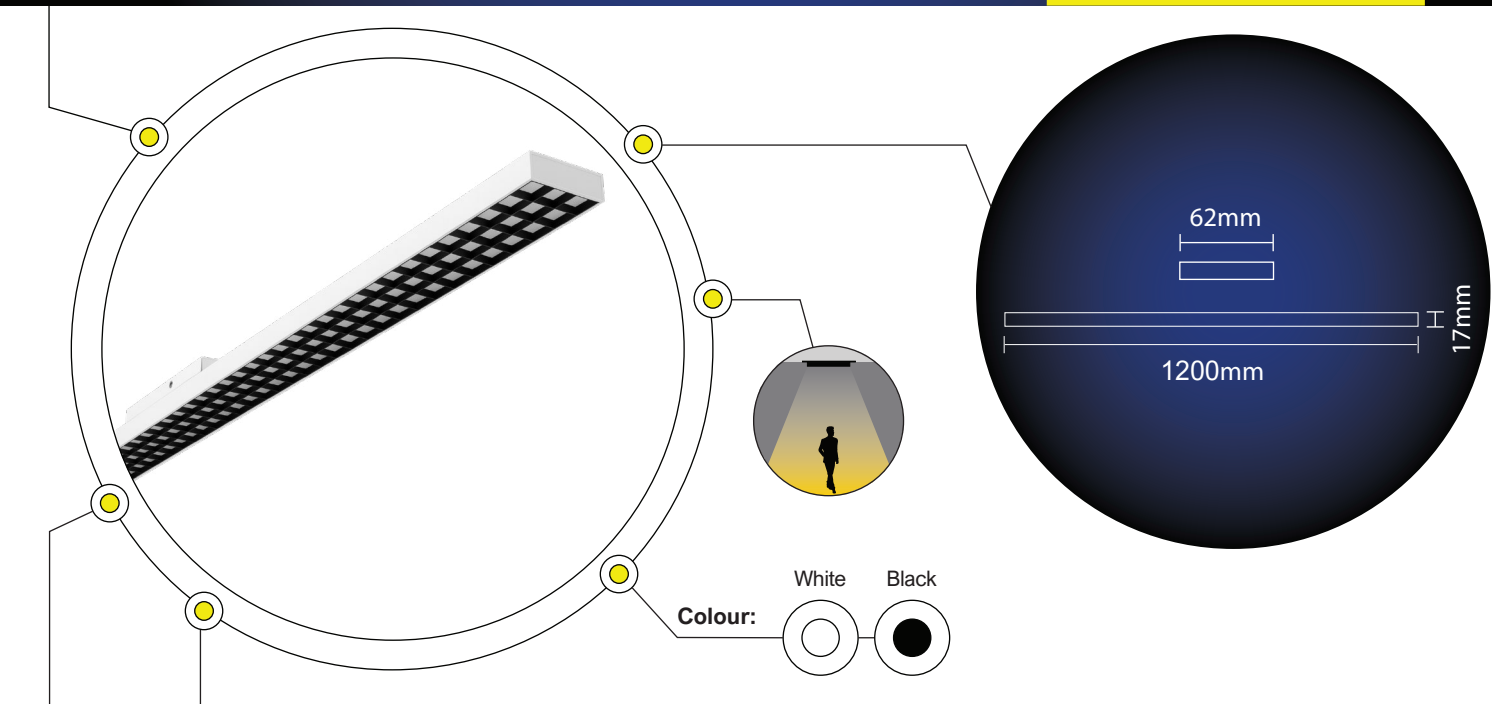

5 YRS

Idt

PHYSICAL DATA

FEATURES

- Material: Aluminum
- Integrated driver and adapter featuring selectable wattage from 25W to 75W, with circuit selection options: L1, L2, L3
- 3000K / 4000K / 5000K fixed CCT
- Integrated driver

OPTIONS & ACCESSORIES

- Flat louvre and lens module with five different optics available
- Available in 3 lengths: 600mm / 1200mm / 1500mm
- Available in 3 Wattages: 25W / 40W / 50W

- Dimming: On/Off DALI
- Sensor & emergency version available on request

MOUNTING

Track mounted


APPLICATION AREAS

Indoor, Commercial, Residential, Retail

TECHNICAL DATA

LTL40404031

LAMP	LED
TOTAL POWER (W)	40W
SYSTEM OUTPUT (LM)	6400LM
EFFICACY (LM/W)	160LM/W
CCT (K)	4000K
CRI (Ra)	90
BEAM ANGLE	60° / 90°
RATED LIFE (HRS)	50 000HRS L90B10
UGR	<19 AND <22
MAC ADAM STEP	SDCM <3
DIMENSIONS	W:62 x L:1200 x H:17mm

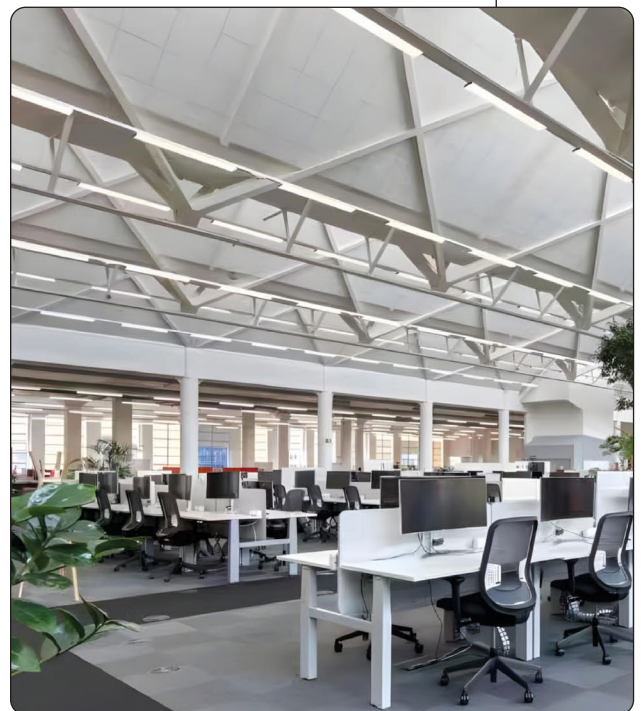

LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

E&OE MAY OCCUR

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com