

PHYSICAL

FEATURES

- Material: Stainless Steel
- Simple and elegant tubular shapes
- Can be used singularly or clustered together for a dynamic composition
- TRIAC Dimming

MOUNTING

Suspended

APPLICATION AREAS

Interior, Commercial, Residential, Hospitality, Retail

OPTIONS & ACCESSORIES


- Available in different lengths
- Wall mounted and suspended versions available

TECHNICAL DATA

LF305512EDT

LF305612EDT

LAMP	LED	LED
TOTAL POWER (W)	12,4W	12,4W
SYSTEM OUTPUT (LM)	810LM	810LM
CCT (K)	3000K	3000K
CRI (Ra)	90	90
BEAM ANGLE	36°	36°
OPERATING VOLTAGE-VAC	220-240V	220-240V
SOURCE POWER (W)	10,5W	10,5W
WEIGHT (KG)	1KG	1,2KG
CUP DIAMETER	Ø86mm	Ø86mm
CUP HEIGHT	35mm	35mm
CORD LENGTH	1000mm	1000mm
PENDANT DIAMETER	Ø86mm	Ø86mm
PENDANT HEIGHT	150mm	225mm

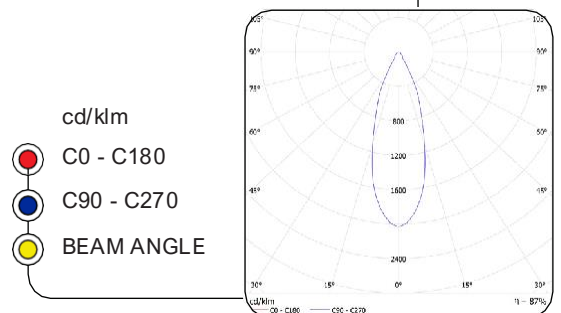

E&OE MAY OCCUR

