




+ IP
20

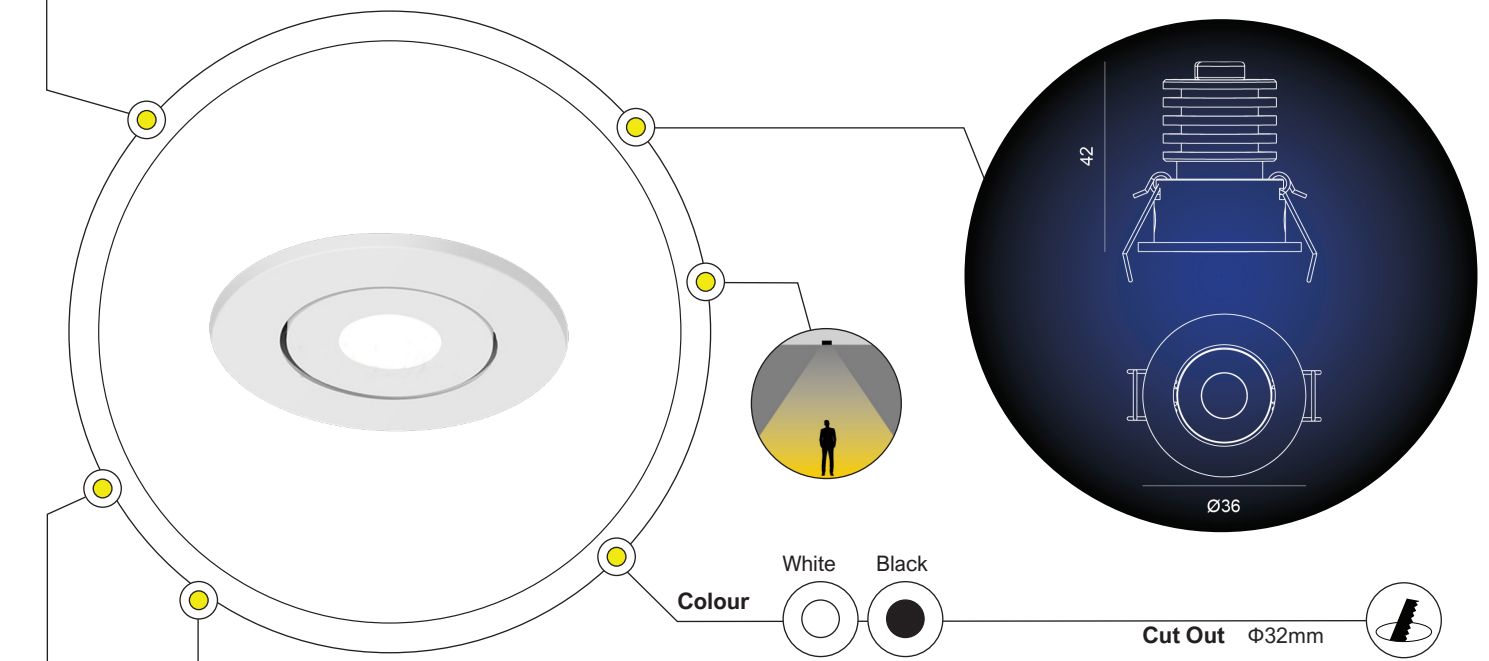

LOA

✓
5 YRS

ldt

PHYSICAL DATA

FEATURES

- Aluminium
- Low Flicker
- Low Power
- Spotlighted Small Angle
- Diffusion Irradiation

OPTIONS & ACCESSORIES

Fixed and adjustable version
Stainless Steel version available

MOUNTING

Ceiling Recessed

APPLICATION AREAS

Interior, Commercial, Residential, Hospitality, Retail


TECHNICAL DATA

LF134711AW3K

LAMP	LED
TOTAL POWER (W)	4.3W
SYSTEM OUTPUT (LM)	121LM
BEAM ANGLE	15 / 25 / 45°
CCT (K)	2700 / 3000 / 4000K
CRI (Ra)	80
CURRENT (mA)	700
OPERATING VOLTAGE-VAC	100-240 V
FLICKER FACTOR	1935.48HZ/6.15%
WEIGHT (Kg)	0,1 Kg
CUT OUT	Ø32mm



- cd/klm
- C0 - C180
 - C90 - C270
 - BEAM ANGLE



E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116 / 7662
info@lightsbylinea.com | www.lightsbylinea.com