




+IP
54



LOA

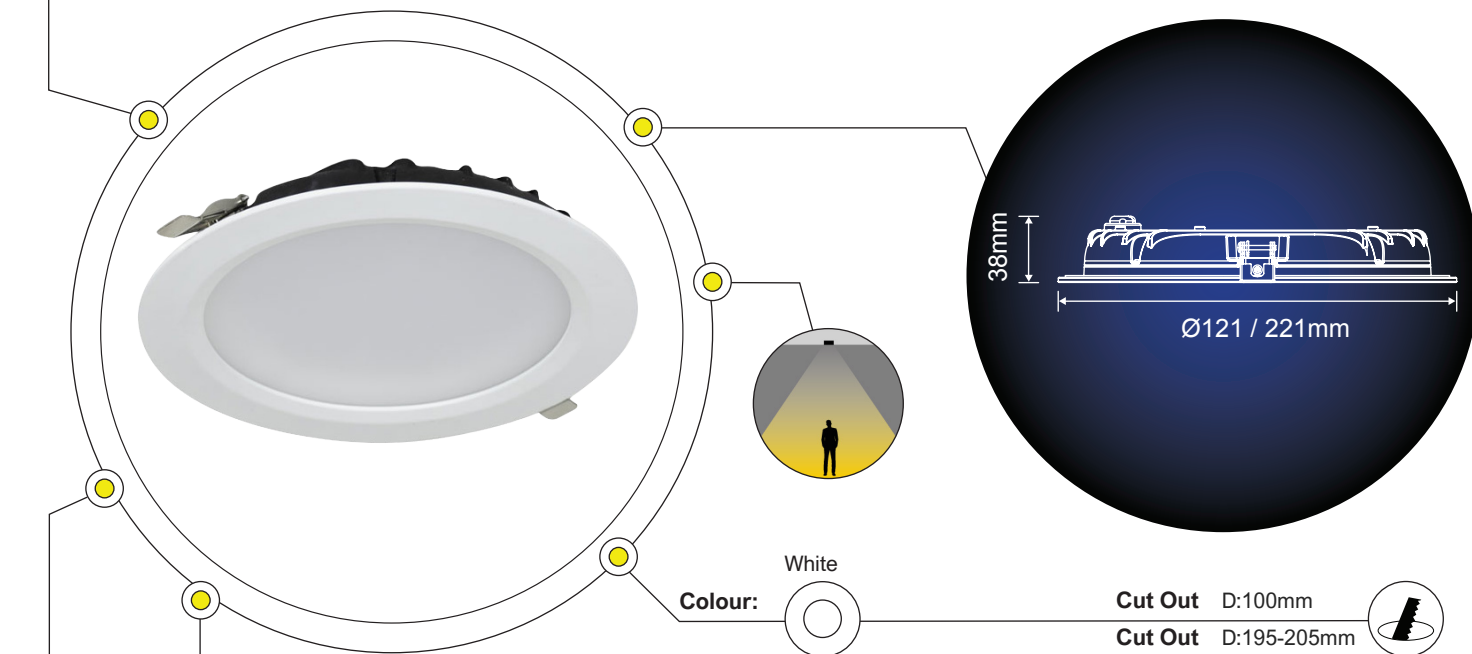

ldt

PHYSICAL DATA

FEATURES

- Material: Die-cast aluminium housing with polycarbonate diffuser
- Luminaire offers optimum light transmission with good uniformity whilst reducing eye discomfort glare
- Slim profile allowing easy installation in ceilings with shallow void and wide flange trim helps cover poorly cut or existing cut-outs
- Suitable for use with R3EMPK-PSU emergency pack and HED2040-D DALI, 1-10V, Push Dim driver

- Suitable for switching by PIR, Microwave or Photocell

OPTIONS & ACCESSORIES

Surface Mount Can available (RMPSMK-01)

MOUNTING: Recessed

APPLICATION AREAS: Indoor, Commercial, Hospitality Retail, Educational Sector, Hospitals

TECHNICAL DATA

RVR1040-01


RVR1840-01

RVR2440-01

LAMP	LED	LED	LED
TOTAL POWER (W)	9.5W	18W	23.7W
SYSTEM OUTPUT (LM)	1030LM	2270LM	2990LM
EFFICACY (LM/W)	108	126	126
CCT (K)	4000K	4000K	4000K
CRI (RA)	80	80	80
BEAM ANGLE	100°	100°	100°
OPERATING VOLTAGE	220-240V	220-240V	220-240V
OPERATING TEMP (°C)	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C
RATED LIFE (HRS)	50 000HRS	50 000HRS	50 000HRS
POWER FACTOR	0.95	0.95	0.95
WEIGHT (KG)	0.26KG	0.6KG	0.6KG
ILLUM @ 1M (LUX)	390	920	1200
DIMENSIONS	D:121 x H:38mm	D:221 x H:38mm	D:221 x H:38mm
CUT OUT	D:100mm	D:195-205mm	D:195-205mm

CD / KLM

- C0 - C180
- C90 - C270



E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com