



LIGHTS BY
LINEA

EST. 1990

COMMERCIAL & ARCHITECTURAL

BROCHURE

Our Mission Statement




Lighting Beyond Illumination

We craft innovative lighting design solutions that don't just light spaces — they transform them.

From concept to specification, we ensure the right product for every project, achieving your vision with precision and style.

Competitive pricing. On-time delivery. Uncompromising quality.

Technical Information & Symbol Descriptions

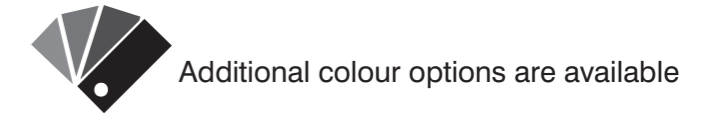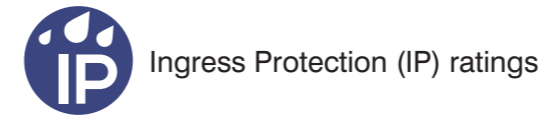



CEILING

SURFACE DOWNLIGHTS

COMMERCIAL & ARCHITECTURAL



LBLD13003

Wattage:
7W

Beam Angle:
35°

CCT: 3CCT
2700/4000/6500K

System Output:
530LM @2700K

Dimensions:
Ø60x122mm



LSD01

Wattage:
20/30W

Beam angle:
15°/ 44°

CCT:
3500/4000K

System Output:
2245LM @3500K 20W
2867LM @3500K 30W

Dimensions:
Ø117x176mm



LF210212EDT

Wattage:
18W

Beam Angle:
35°

CCT:
3000K

System Output:
1087LM @3000K

Dimensions:
Ø96x100mm



LF213414EDT

Wattage:
6W

Beam Angle:
37°

CCT:
3000K

System Output:
499LM @3000K

Dimensions:
Ø85x54.5mm



LF208415DT

Wattage:
20W

Beam Angle:
38°

CCT:
3000K/4000K


System Output:
1624LM @3000K

Dimensions:
Ø120x77mm



CEILING LIGHTS

COMMERCIAL & ARCHITECTURAL



LF22

Wattage:
14/43/67W

Beam Angle:
120°

CCT:
3000K

System Output:
712LM @3000K 14W
2360LM @3000K 43W
5366LM @3000K 67W

Dimensions:
Ø160x50mm
Ø350x60mm
Ø600x60mm



LF223714

Wattage:
40W

Beam Angle:
120°

CCT:
3000K

System Output:
2858LM @3000K

Dimensions:
Ø350x90.4mm
Ø650x93.2mm



3CCT PANEL

Wattage:
18/24/32W

Beam Angle:
120°

CCT: 3CCT
3000/4000/6000K

System Output:
1700LM @3000K 18W
2400LM @3000K 24W
3200LM @3000K 32W

Dimensions:
Ø230x25mm
Ø300x25mm
Ø400x25mm



SURFACE SPOTS

GU10 & INTEGRATED



LF224919EDT

Wattage:
20W

Beam Angle:
25°

CCT:
3000K

System Output:
119LM @3000K

Dimensions:
Ø72x157mm



LSS052GU1031

Wattage:
GU10 7.5W Max

Dimensions: LxHxD
336x96xØ60mm



LSS053GU10

Wattage:
GU10 7.5W Max

Dimensions: LxHxD
560x98xØ60mm



LSS04GU10

Wattage:
GU10 7.5W Max


Dimensions:
Ø60x98mm



LSS06GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x98mm

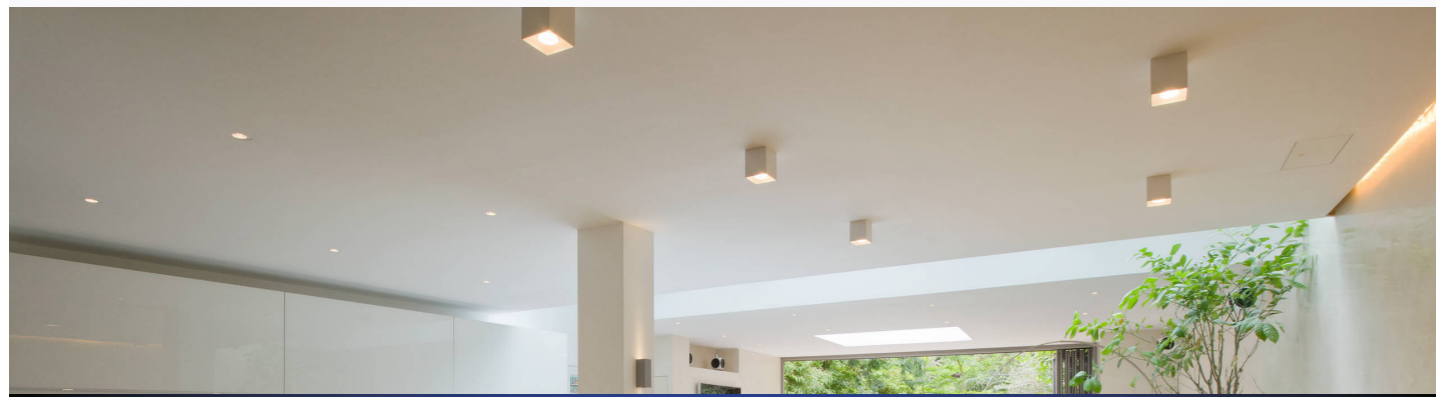

RECESSED DOWNLIGHTS

COMMERCIAL & ARCHITECTURAL



LRD02

Wattage:
15W

Beam angle:
42°

CCT:
3500/4000K

System Output:
1749LM @3500K

Dimensions:
Ø157x119mm



LRD03

Wattage:
25W

Beam angle:
60°

CCT:
3500/4000K

System Output:
1984LM @3500K

Dimensions:
Ø180x119mm



LRD04

Wattage:
7W

Beam angle:
28°

CCT:
3500/4000K

System Output:
629LM @3500K

Dimensions:
Ø85x105mm



LRD09

Wattage:
25W

Beam angle:
40°/60°

CCT:
3500/4000K

System Output:
1681LM @3500K

Dimensions:
Ø165x155mm



LRD16

Wattage:
25W

Beam angle:
20°/37°

CCT:
3500/4000K

System Output:
1845LM @3500K

Dimensions: DxWxL
Ø103x155x122mm



LRD20S

Wattage:
25W

Beam angle:
78°

CCT:
3500/4000K

System Output:
1786LM @3500K

Dimensions: LxWxH
180x130x108mm



LRD28

Wattage:
12W

Beam angle:
120°

CCT: 3CCT
3000/4000/6000K

System Output:
1380LM @3000K

Dimensions:
Ø75x42mm



LRD71

Wattage:
10/18/24W

Beam angle:
120°

CCT: 3CCT
3000/4000/6000K

System Output:
1000LM @3000K 10W
1800LM @3000K 18W
2400LM @3000K 24W

Dimensions:
Ø140x28mm
Ø190x28mm
Ø230x28mm



LRD72

Wattage: selectable
18/24W or 26/35W

Beam angle:
60°

CCT: 3CCT
3000/4000/6000K

System Output:
2160LM @3000K 18W
2880LM @3000K 24W
3120LM @3000K 26W
4200LM @3000K 35W

Dimensions:
Ø165x60mm
Ø220x66.5mm



LRD73

Wattage:
7/12/18W

Beam angle:
24°/36°

CCT:
3000/4000K

System Output:
665LM @3000K 7W
1140LM @3000K 12W
1710LM @3000K 18W

Dimensions:
Ø63x45mm
Ø79x49mm
Ø94x52mm



LRD74

Wattage:
10/18/24W

Beam angle:
90°

CCT:
3000/4000K

System Output:
1000LM @4000K 10W
1800LM @4000K 18W
2400LM @4000K 24W

Dimensions:
Ø113x49mm
Ø174x65mm
Ø232x77mm



LF102024EA

Wattage:
6.7W

Beam angle:
20°

CCT:
3000K/4000K

System Output:
477LM @3000K

Dimensions:
Ø75x54.8mm



LF102025EA


Wattage:
6.7W

Beam angle:
20°

CCT:
3000K/4000K

System Output:
477LM @3000K

Dimensions:
Ø75x54.8mm



LF176212EDT

Wattage:
9.12W

Beam angle:
36°

CCT:
3000K/4000K

System Output:
508LM @3000K

Dimensions:
Ø56x68mm



LF156012BEA

Wattage:
11W

Beam angle:
31°

CCT:
3000K/4000K

System Output:
698LM @3000K

Dimensions:
Ø82x42mm



COMMERCIAL & ARCHITECTURAL



LF189312EA

Wattage:
13.7W

Beam angle:
30°

CCT:
3000/4000K

System Output:
1037LM @3000K

Dimensions:
Ø108x66mm



LF189212EA

Wattage:
11W

Beam angle:
24°

CCT:
3000/4000K

System Output:
667LM @3000K

Dimensions:
Ø93x74mm



LF111819EDT


Wattage:
12.3W

Beam angle:
36°

CCT:
3000/4000K

System Output:
618LM @3000K

Dimensions:
Ø110x78mm



LF148211A

Wattage:
2.2W

Beam angle:
20°

CCT:
3000K

System Output:
170LM @3000K

Dimensions:
Ø52x24mm



LF136511A

Wattage:
2.2W

Beam angle:
25°

CCT:
3000K

System Output:
121LM @3000K

Dimensions:
Ø37x55mm






LRD23GU1031

Wattage:
GU10 7.5W Max

Dimensions:
Ø92x28mm



LRD23GU10AD

Wattage:
GU10 7.5W Max

Dimensions:
Ø92x28mm



LRD23GU10IP

Wattage:
GU10 7.5W Max

Dimensions:
Ø85x50mm



LRD36

Wattage:
GU10 7.5W Max

Dimensions:
Ø92x46mm



LRD52

Wattage:
GU10 7.5W Max

Dimensions:
Ø85x44mm




LRD67

Wattage:
GU10 4.5W Max

Dimensions:
Ø66x35mm



RECESSED SPOTS



LF178712EDT


Wattage:
9.5W

Beam angle:
28°

CCT:
3000K

System Output:
388LM @3000K

Dimensions:
Ø45x75mm



LF177912EDT


Wattage:
11W

Beam angle:
28°

CCT:
3000K

System Output:
388LM @3000K

Dimensions:
Ø100x110mm



LF178012EDT

Wattage:
16W

Beam angle:
32°


CCT:
3000K

System Output:
537LM @3000K

Dimensions:
Ø120x123mm



PENDANTS



LBLP27

Wattage:
60/93/186W

Beam angle:
120°

CCT:
3000/4000K

System Output:
4264LM @4000K 60W
6720LM @4000K 93W
13520LM @4000K 186W

Dimensions:
Ø1000x50x80mm
Ø1500x50x80mm
Ø3000x50x80mm



LBLP29


Wattage:
18/26/32/41W

Beam angle:
35°/50°

CCT:
3000/3500/4000K

System Output:
2250LM @4000K 18W
3855LM @4000K 26W
4615LM @4000K 32W
5605LM @4000K 41W

Dimensions:
Ø32x203mm



LF334417



Wattage:
4.2W

Beam angle:
12°

CCT:
3000K

System Output:
28LM @3000K

Dimensions:
Ø32x203mm
Ø32x303mm
Ø32x403mm



LF326211


Wattage:
7.1W

Beam angle:
19°

CCT:
3000K

System Output:
446LM @3000K

Dimensions:
Ø25x350mm
Ø25x550mm
Ø25x750mm



LF327419


Wattage:
34W

Beam angle:
180°

CCT:
3000K

System Output:
1451LM @3000K

Dimensions: LxWxH
1552x15x16mm




LF331819

Wattage:
86/90W

Beam angle:
180°

CCT:
2700-4700K

Dimensions:
Ø22x5000mm

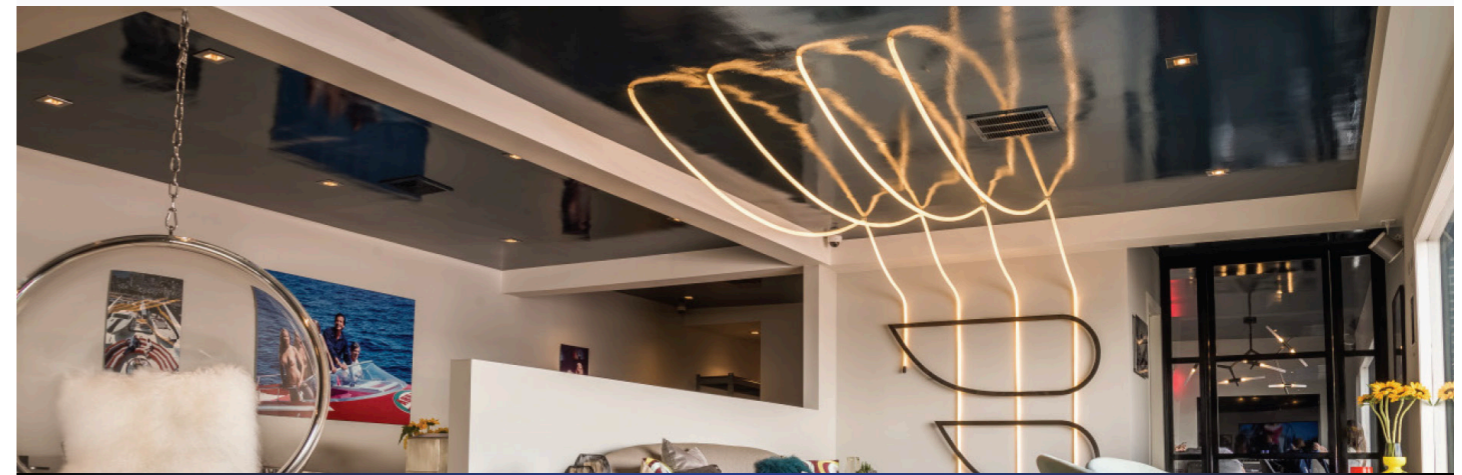

1-CIRCUIT 3-WIRE TRACK




LBLT3


Dimensions: LxWxH
1000x35x16mm



ARCHITECTURAL



LBLT3PF
POWER FEED



LBLT3IJ
I-JOINER



LBLT3IC
I-CONNECTOR



LBLT3LC
L-CONNECTOR



LBLT3TC
T-CONNECTOR




LBLT3XC
X-CONNECTOR



LBLT3FC
FLEXI CONNEC-
TOR



LBLT3TA
TRACK ADAP-
TOR



LBLT3ST
SUSPENSION
TRACK



LBLT3STK
SUSPENSION
KIT

GU10



LTL35GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x98mm



LTL35GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x98mm



3 CIRCUIT TRACK



N04728


Dimensions: LxWxH
1000x35x35mm




COMMERCIAL & ARCHITECTURAL




N04718
TRACK CLIP
WIRE/ROD




N0471120
END COVER



N04720120
X-CONNECTOR




N04720220
T-CONNECTOR L



N04730320
T-CONNECTOR R




N04720420
L-CONNECTOR



N04720520
MIDDLE
CONNECTOR



N04720620
LEFT END FEED



N04720720
RIGHT END FEED



N04720920
MINI
CONNECTOR



N04725520
FLEXIBLE
CONNECTOR



N04726420
FLEX 60
CONNECTOR



N047128
CEILING PROFILE



N04776
TRACK CLIP



N047286
SUSPENSION
KIT

3-CIRCUIT TRACK SPOTS



LTL21

Wattage:
37W

Beam angle:
15°/43°/53°

CCT:
3500/4000K

System Output:
3443LM @3500K
3703LM @4000K

Dimensions: DxLxW
Ø96x113x208mm



ZEN EVO 40W

Wattage:
40W

Beam angle:
16°/40°/60°

CCT:
3500K/4000K

System Output:
4800LM @3500K

Dimensions:
Ø104 x 222mm



LTL27

Wattage:
4/6/8W

Beam angle:
18°-50° selectable

CCT: 5CCT
2700/3000/3500/
4000/5000K

System Output:
405LM @3000K 4W
531LM @3000K 6W
644LM @3000K 8W

Dimensions:
Ø50x100mm



LTL38

Wattage:
30W

Beam angle:
27°-50° zoomable

CCT:
3000/4000K

System Output:
2264-2855LM @3000K

Dimensions:
Ø80x170mm



LTL39

Wattage:
20W

Beam angle:
90° zoom & framer

CCT:
3000/4000K

System Output:
350LM @4000K

Dimensions:
Ø80x250mm



ZEN EVO 31W

Wattage:
31W

Beam angle:
16°/40°/60°

CCT:
3500K/4000K


System Output:
4000LM @3500K

Dimensions:
Ø104x222mm




COMMERCIAL

LUNA S SURFACE MAGNETIC TRACK SYSTEM



LF0015

Dimensions: LxWxH
500x67.4x41.9mm
1000x42.3x18mm
2000x42.3x18mm



LF001680
LUNA S/M PIN



LF001586
LUNA S ON
CORNER L1



LF001587
LUNA S ON
CORNER L2



LF001589
LUNA S ON
MOUNT CLIP L3



LF001377
LUNA S ON
CONNECTOR

COMMERCIAL & ARCHITECTURAL




Project: SMS / Lighting Design: Liena Kuhn




Project: Zodi Apartment, Durban

LUNA S RECESSED MAGNETIC TRACK SYSTEM



LF0015

Dimensions: LxWxH
 500x67.4x41.9mm
 1000x67.4x41.9mm
 2000x67.4x41.9mm



LF001680
 LUNA S/M PIN



LF001374
 LUNA S DC CORNER L1



LF001375
 LUNA S DC CORNER L2




LF001376
 LUNA S DC CORNER L3



LF001377
 LUNA S DC CONNECTOR

LUNA S TRACK SPOTS



LF575619AW

Wattage:
6.8W

Beam angle:
14°

CCT:
3000K

System Output:
380LM @3000K

Dimensions: D_xLxH
 Ø30x186x125mm



LF575712PWB


Wattage:
6.8W

Beam angle:
14°

CCT:
3000K

System Output:
380LM @3000K

Dimensions: D_xLxH
 Ø30x186x125mm



LF575712PWMGL


Wattage:
6.8W

Beam angle:
14°

CCT:
3000K

System Output:
380LM @3000K

Dimensions: D_xLxH
 Ø30x186x125mm



LF552216PAB


Wattage:
4.7W

Beam angle:
20°

CCT:
3000K

System Output:
79LM @3000K

Dimensions: LxWxH
 150x14.6x14.6mm



LF560312

Wattage:
20W

Beam angle:
180°

CCT:
3000K

System Output:
912LM @3000K

Dimensions: LxWxH
 300x14.6x24.5mm
 600x14.6x24.5mm



LINEAR LIGHTING



LBLEXTA64

Wattage:
23/46W/m

Beam angle:
120°

CCT:
3000/3500/4000K

System Output:
 2214.2LM @3500K 23W/m
 2419.37LM @4000K 23W/m

Dimensions: LxWxH
 *x 55 x 75mm



LLEDSW1


Wattage:
20/28/41W/m

Beam angle:
120°

CCT:
3000/4000K

System Output:
 3607LM @4000K 20W/m
 4490LM @4000K 28W/m
 6865LM @4000K 41W/m

Dimensions: LxWxH
 *x 50 x 75mm



LLEDSW2


Wattage:
20/28/41W/m

Beam angle:
120°

CCT:
3000/4000K

System Output:
 3805LM @4000K 20W/m
 5280LM @4000K 28W/m
 4322LM @4000K 41W/m

Dimensions: LxWxH
 *x 50 x 35mm



LLEDSW3


Wattage:
20/28/41W/m

Beam angle:
120°

CCT:
3000/4000K

System Output:
 3805LM @4000K 20W/m
 5280LM @4000K 28W/m
 7322LM @4000K 41W/m

Dimensions: LxWxH
 *x 50 x 90mm



AP500

Wattage:
32W/m

Beam angle:
120°

CCT:
3000/6000K

System Output:
 4000LM @3000K

Dimensions: LxWxH
 *x 40 x 65mm



RECESSED



LLEDSW4


Wattage:
20/28/41W/m

Beam angle:
120°

CCT:
3000/4000K

System Output:
 3805LM @4000K 20W/m
 5280LM @4000K 28W/m
 7322LM @4000K 41W/m

Dimensions: LxWxH
 *x65x35mm



LLEDSW5

Wattage:
20/28/41W/m

Beam angle:
120°

CCT:
3000/4000K

System Output:
 3805LM @4000K 20W/m
 5280LM @4000K 28W/m
 7322LM @4000K 41W/m

Dimensions: LxWxH
 *x68x75mm



HIGHBAY & T-BAY

COMMERCIAL



DLHB0152CCT


Wattage:
110/150/200W

Beam angle:
90°

CCT: 3CCT
4000/5000/5700K

System Output:
16500LM @4000K 110W
21750LM @4000K 150W
28000LM @4000K 200W

Dimensions:
Ø305x181mm



LLEDHB07

Wattage:
160W

Beam angle:
20°x60°/90°

CCT:
4000K

System Output:
22450LM @4000K

Dimensions: LxWxH
594x90x95mm



LLEDBH13

Wattage:
92/145/246W

Beam angle:
60°/90°

CCT:
3000/4000/6500K


System Output:
15852LM @4000K 92W
23850LM @4000K 145W
38868LM @4000K 246W

Dimensions:
1000x173mm
1350x173mm



LED PANELS

COMMERCIAL & ARCHITECTURAL



LLEDP1340

Wattage:
42W

Beam angle:
110°

CCT:
3500/4000K

System Output:
5200LM @4000K

Dimensions: LxWxH
595x595x32mm



LLEDP1341


Wattage:
42W

Beam angle:
110°

CCT:
4000K

System Output:
5460LM @4000K

Dimensions: LxWxH
1195x295x32mm



LLEDP1355

Wattage:
55.5W

Beam angle:
90°

CCT:
4000K

System Output:
7613LM @4000K

Dimensions: LxWxH
1195x595x32mm



LLEDP14404031


Wattage:
40W

Beam angle:
90°

CCT:
4000K

System Output:
3960LM @4000K

Dimensions: LxWxH
595x595x32mm



LLEDP14424031

Wattage:
40W

Beam angle:
90°


CCT:
4000K

System Output:
3960LM @4000K

Dimensions: LxWxH
1195x295x32mm



Project MeedClinic - Stalensbosch / Lighting Design & Photography: Lienka Kuhn



LLEDP1460W

Wattage:
58W

Beam angle:
90°

CCT:
4000K

System Output:
5712LM @4000K

Dimensions: LxWxH
1195x595x32mm



LLEDP03


Wattage:
30/42W

Beam angle:
180°

CCT:
3000/4000/5000K

System Output:
3870LM @3000K 30W
5418LM @3000K 42W

Dimensions: LxWxH
595x595x100mm



GLF04

Wattage:
42/70W

Beam angle:
180°

CCT:
3000/4000/5000K

System Output:
5340LM @3000K 42W
9900LM @3000K 70W

Dimensions: LxWxH
595x595x80mm



COMMERCIAL & ARCHITECTURAL

UTILITY LIGHTS



LLEDB11

Wattage:
36/55/75W

Beam angle:
120°

CCT:
4000K

System Output:
4000LM @4000K 36W
6000LM @4000K 55W
9500LM @4000K 75W

Dimensions: LxWxH
1133x63x76mm
1415x63x76mm
1697x63x76mm



LLEDTP03

Wattage:
50W

Beam angle:
120°

CCT:
4000K

System Output:
5500LM @4000K

Dimensions: LxWxH
1500x50x55mm



LLEDVP05

Wattage:
20-35W

Beam angle:
120°

CCT: 3CCT
4000/5000/6500K

System Output:
3750LM @4000K 20W
5250LM @4000K 35W

Dimensions: LxWxH
1200x80x72mm
1500x80x72mm



Project RMS Shopfiters / Photography: Achigraphy



WALL

WALL LIGHTS



LF418419


Wattage:
7.7W

Beam angle:
0°/90°

CCT:
3000K

System Output:
379LM @3000K

Dimensions:
Ø120x90mm



LF418319

Wattage:
7.7W

Beam angle:
0°/90°

CCT:
3000K

System Output:
379LM @3000K

Dimensions:
90x90mm



LF461122


Wattage:
8W

Beam angle:
35°

CCT:
3000K

System Output:
460LM @3000K

Dimensions:
Ø33x380mm
Ø33x480mm



LF414415DT


Wattage:
3.7W

Beam angle:
180°

CCT:
3000K

System Output:
325LM @3000K

Dimensions:
Ø160x61mm



LF414515DT

Wattage:
3.7W

Beam angle:
180°

CCT:
3000K

System Output:
325LM @3000K

Dimensions: LxWxH
160x62.5x150mm



COMMERCIAL & ARCHITECTURAL

BEDSIDE LIGHTING



LF421314DT

Wattage:
5W

Beam angle:
180°

CCT:
3000K

System Output:
138LM @3000K

Dimensions:
Ø80x93mm



LF425217A

Wattage:
4.5W

Beam angle:
21°

CCT:
3000K

System Output:
144LM @3000K

Dimensions:
91x91mm



LWL25GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x105mm



LWL26GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x105mm



ART & BATHROOM LIGHTING



LBLPL0114

Wattage:
14W

CCT:
3000K

Dimensions: LxWxH
660x190x40mm



LBLPL03

Wattage:
8/12W

CCT:
3000K

Dimensions: LxWxH
46x21x12mm
67.5x21x12mm



LBLBL029

Wattage:
9W

CCT:
5700K

System Output:
865LM @5700K

Dimensions: LxWxD
500x77xØ36mm




LWL27

Wattage:
7/8W

CCT:
2700/3000K

System Output:
897LM @2700K 7W
975LM @2700K 8W

Dimensions:
Ø100x128mm




S928633030

Wattage:
12/20W

CCT:
3000K

System Output:
152LM @3000K 12W
2304LM @3000K 20W

Dimensions: LxWxH
514x80x30mm
830x80x30mm

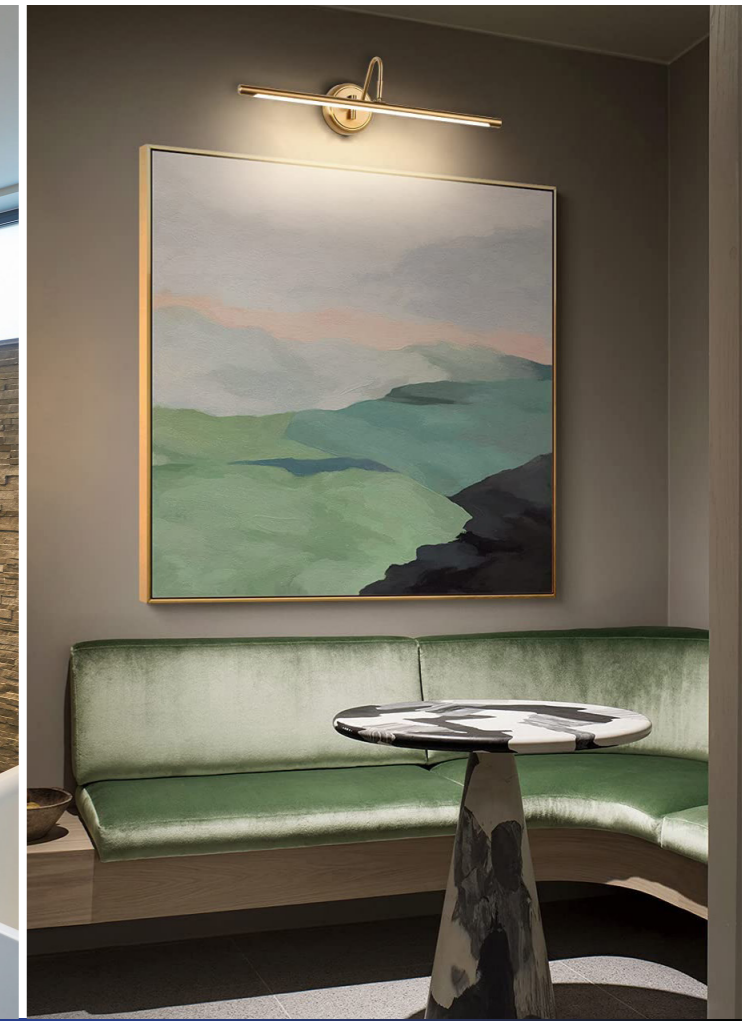

ILLUMINATED MIRRORS












COMMERCIAL & ARCHITECTURAL


				
				
LBLML0120	LBLML0212	LBLML03	LBLML0420W	LBLBL05
Wattage: 20W	Wattage: 12W	Wattage: 30/40W	Wattage: 20W	Wattage: 36W
CCT: 5700K	CCT: 5700K	CCT: 5700K	CCT: 5700K	CCT: 4000K
System Output: 850/950/1070/ 1180LM	System Output: 720LM @5700K	System Output: 850LM @5700K 30W 1135LM @5700K 40W	System Output: 890/945LM	System Output: 1300LM @4000K
Dimensions: 600x800mm 800x800mm 1000x800mm 1200x800mm	Dimensions: Ø750mm	Dimensions: 600x800mm 800x800mm 1000x800mm 1200x800mm	Dimensions: DxWxH Ø750x600x700mm Ø750x700x800mm	Dimensions: LxWxH 580x40x990mm



FOOTLIGHTS


COMMERCIAL & ARCHITECTURAL

				
				
LF419117	LF414917	LF408611	LF409311	LF414817AW
Wattage: 4W	Wattage: 4W	Wattage: 4W	Wattage: 4W	Wattage: 3.8W
Beam angle: 29°-53°	Beam angle: 51°-57°	Beam angle: 26°-33°	Beam angle: 28°-34°	Beam angle: C (48°76°-36°)
CCT: 3000K	CCT: 3000K	CCT: 3000K	CCT: 3000K	CCT: 3000K
System Output: 80LM @3000K	System Output: 69LM @3000K	System Output: 27LM @3000K	System Output: 27LM @3000K	System Output: 151LM @3000K
Dimensions: LxWxH 38x35x70mm	Dimensions: LxWxH 40x70x70mm	Dimensions: Ø55x42mm	Dimensions: LxWxH 42x55x55mm	Dimensions: Ø80x25mm
○ ●	○ ●	○ ●	○ ●	○ ●
				
LF440516				
Wattage: 0.9W				
Beam angle: 180°				
CCT: 3000K				
System Output: 15LM @3000K				
Dimensions: LxWxH 54x90x90mm				
○ ●				

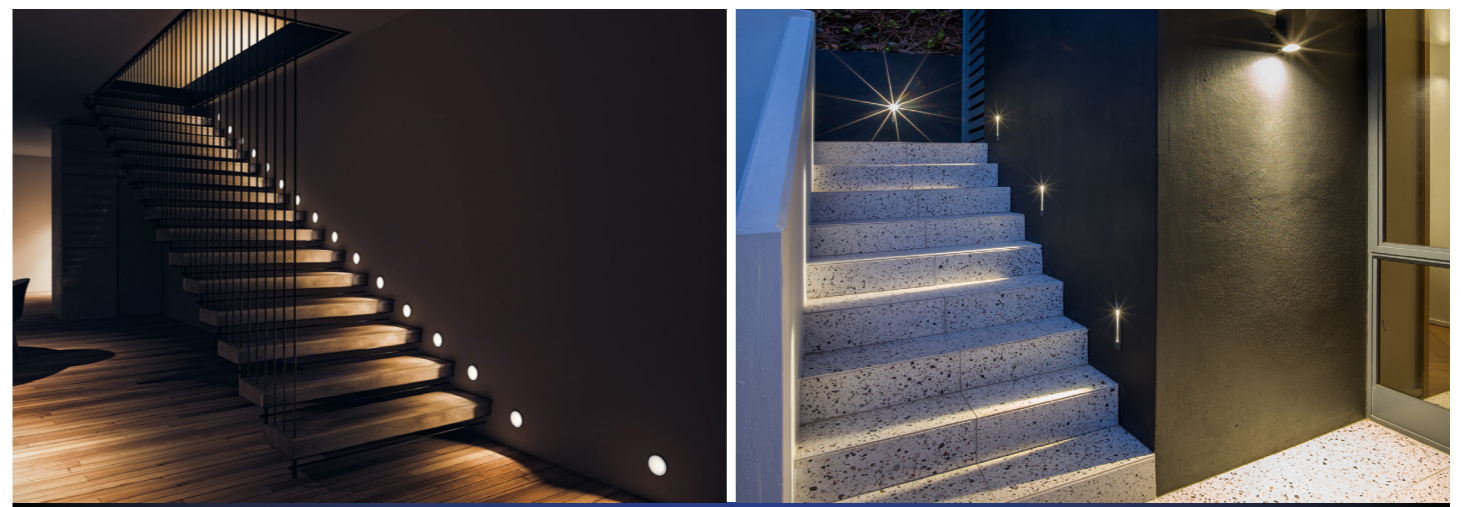


STRIPS

PROFILES & DIFFUSERS





LBLEXTA4

Dimensions: LxWxH
2000x23.1x7mm




LBLEXTA6

Dimensions: LxWxH
2000x17.5x7mm




LBLEXTA11

Dimensions: LxWxH
2000x17.5x15mm




LBLEXTA12B

Dimensions: LxWxH
2000x44x35mm



LBLEXTA13

Dimensions: LxWxH
2000x16x16mm




LBLEXTA18

Dimensions: LxWxH
2000x10x10mm



LBLEXTA48

Dimensions: LxWxH
2000x35x35mm



LBLEXTA54

Dimensions: LxWxH
2000x15x6.27mm




LBLEXTACLIP
END CAPS**




LBLEXTAEC
CLIPS**

CORNICES




LBLCORN1

Dimensions: LxWxH




LBLCORN2

Dimensions: LxWxH




LBLCORN3

Dimensions: LxWxH

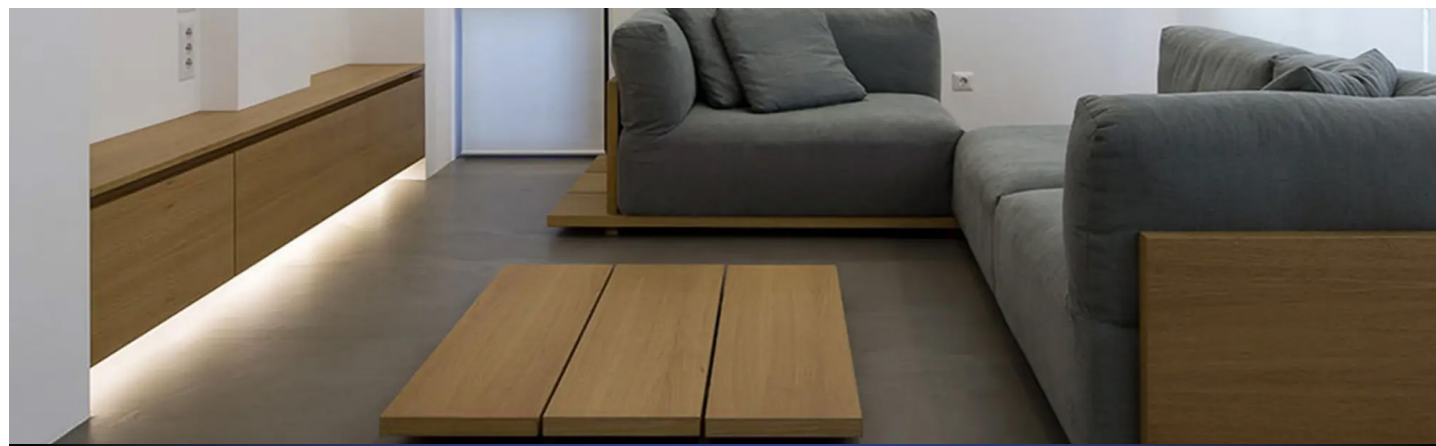

24V LED STRIPS



LBLFLEX4.8

Wattage:
4.8W

CCT:
3000/4000K

System Output:
375LM @3000K
397LM @4000K

Cut length:
100mm




LBLFLEX14.4

Wattage:
14.4W

CCT:
3000/3500/4000K

System Output:
2154LM @3000K
2278LM @3500K
2947LM @4000K

Cut length:
50mm



LBLFLEX23

Wattage:
23W

CCT:
3000/3500/4000K

System Output:
2117LM @3000K
2214LM @3500K
2419LM @4000K

Cut length:
25mm



LBLFLEX10

Wattage:
10W

CCT:
3000/4000K

System Output:
880LM @3000K
989LM @4000K

Cut length:
50mm



LBLFLEX5

Wattage:
5W

CCT:
3000K

System Output:
512LM @3000K

Cut length:
50mm



LBLFLXW14.4

Wattage:
14.4W

CCT:
3000/4000K

System Output:
2135LM @3000K
2947LM @4000K

Cut length:
25mm



LBLFLEXW12

Wattage:
12W

CCT:
3000K

System Output:
780LM @3000K

Cut length:
166.6mm



**LBLFLEX18
DTW224**

Wattage:
18W

CCT: (Dim to warm)
1800-3000K

System Output:
1529LM @3000K

Cut length:
62.5mm



**LBLFLEX14.4
RGB**

Wattage:
14.4W

CCT: (All colors RGB @100%)
RGB 39015.80K

System Output:
620LM

Cut length:
100mm




**LBLFLEXW14.4
RGB**

Wattage:
14.4W

CCT: (All colors RGB @100%)
RGB 42300K

System Output:
620LM

Cut length:
100mm




**LEDFLEX-
19.2CW RGB**

Wattage:
19.2W

CCT:
RGBW 4000K

System Output:
1287LM @4000K

Cut length:
62.5mm




**LEDFLEX-
19.2WW RGB**

Wattage:
19.2W

CCT:
RGBW 3000K

System Output:
1287LM @3000K

Cut length:
62.5mm




LBLNEON6

Wattage:
6W

CCT:
3000-3500K

System Output:
348LM @3000K

Cut length:
25mm



LEDNEON10

Wattage:
9.6W

CCT:
2700/3000/4000/
6000K

System Output:
500LM @2700K

Cut length:
50mm




3DSILICONE-NEON

Wattage:
10W

CCT:
3000/4000/6000K

System Output:
700LM @3000K
730LM @4000K/6000K

Cut length:
50mm



MAGICNEON-RGB

Wattage:
6.4/19.2W/m

CCT:
RGB

System Output:
108LM/m @6.4W/m
696LM/m @19.2W/m

Cut length:
41.66mm



MAGICNEON SINGLE COLOR


Wattage:
16W/m

CCT:
3000/4000K

System Output:
1457LM @3000K
1466LM @4000K

Cut length:
41.66mm

DRIVERS & ACCESSORIES




LED(75/150)TD24

Wattage:
75/150W

Input voltage:
220-240V

Ouput voltage:
DC24V

Dimensions: LxWxH
273x57x37mm
293x43x30mm




LED(75/150)CTDALI24V

Wattage:
75/150W

Input voltage:
220-240V

Ouput voltage:
DC24V

Dimensions: LxWxH
273x57x37mm
293x43x30mm



LED(75/150)ADDALI24V

Wattage:
75/150W

Input voltage:
0-10V/1-10V/
10V PWM

Ouput voltage:
DC24V

Dimensions: LxWxH
293x43x30mm
352x43x30mm



LBL(75/150)WNWP24VDD

Wattage:
75/150W

Input voltage:
100-240V

Ouput voltage:
DC24V

Dimensions: LxWxH
213x54x33mm
206x75x41mm




LBL(75/150)WNWP24VTD

Wattage:
75/150W

Input voltage:
220-240V

Ouput voltage:
DC24V

Dimensions: LxWxH
213x54x33mm
260x78.3x45mm




LBL(60/120/150)NWP12V

Wattage:
60/120/150W

Input voltage:
100-250V

Ouput voltage:
DC12/24V

Dimensions: LxWxH
110x78x35mm
160x98x38mm



LBL(60/100/150)NWP

Wattage:
60/100/150W

Input voltage:
100-250V

Ouput voltage:
DC12/24V

Dimensions: LxWxH
110x78x35mm
160x98x38mm



LBL(75/150)WP12VJ

Wattage:
75/150W

Input voltage:
170-250V

Ouput voltage:
DC12V

Dimensions: LxWxH
213x54x33mm
244x71x45mm



LBL(60/150)WP24V

Wattage:
60/150W

Input voltage:
90-370V

Ouput voltage:
DC12/24V

Dimensions: LxWxH
148x40x30mm
162.5x42.5x32mm
191x63x37.5mm



LBL150WNW-P24VSN

Wattage:
150W

Input voltage:
220-240V

Ouput voltage:
24V

Dimensions: LxWxH
320x30x18.2mm



LBL75WNW-P24VSN

Wattage:
75W

Input voltage:
180-240V

Ouput voltage:
24V

Dimensions: LxWxH
304.6x30x16.7mm



LBL150WNWP24

Wattage:
150W

Input voltage:
220-240V

Ouput voltage:
24V

Dimensions: LxWxH
336.6x30x18.2mm



LEDCTMM1

Wattage:
108/216W

Input voltage:
12-24V

Ouput voltage:
DC12/24V

Dimensions: LxWxH
104x60x90mm




LEDCTMM8

Wattage:
100/240/480W

Input voltage:
220-240V

Ouput voltage:
DC5/12/24V

Dimensions: LxWxH
104x58x90mm



LBLPANEX5

Input voltage:
100-240V

Ouput voltage:
DC5/12/24V

Dimensions: LxWxH
86x86x36mm



LBLPANEX8S-RGBW

Input voltage:
100-240V

Ouput voltage:
DC5/12/24V

Dimensions: LxWxH
86x86x36mm



LBLPANBLEUB-1DIM

Input voltage:
120-240V

Ouput voltage:
DC5/12/24V

Dimensions: LxWxH
451x75x30mm



LBLPANBLEUB4RGBW

Input voltage:
120-240V

Ouput voltage:
DC5/12/24V

Dimensions: LxWxH
451x75x30mm




P410ARC SUSPENSION CABLES



LBLMSWITCH MAGNETIC SWITCH



CD_IR-MS MINI PIR SWITCH



LBLQUICKCONNECTM/F QUICK CONNECTORS

OUTDOOR

POST TOPS



LLEDPT01

Wattage:
30/42W

Beam angle:
Symmetrical

CCT:
4000/5000K

System Output:
5040LM @4000K 30W
7056LM @4000K 42W

Dimensions:
Ø467x350mm

○



LLEDPT02

Wattage:
28W

Beam angle:
Symmetrical

CCT:
3000/4000/5000K

System Output:
4088LM @4000K

Dimensions:
Ø473x370mm

●



LLEDPT06

Wattage:
20/37/40/75W

Beam angle:
Asymmetric

CCT:
3000/4000K

System Output:
2184LM @3000K 20W
4280LM @3000K 37W
2x2184LM @3000K 40W
2x4280LM @3000K 75W

Dimensions: LxWxH
575x160x60mm

● ○



LED SHINE

Wattage:
19/38W

Beam angle:
Louvre

CCT:
3000/4000K

System Output:
2041LM @3000K 19W
4082LM @3000K 38W

Dimensions:
Ø545x564mm

○ ● ○



SELBOURNE

Wattage:
42W

Beam angle:
Symmetrical

CCT:
3000/4000K

Dimensions:
270x550mm

● ○

FLOODLIGHTS



DLFL10

Wattage:
10W

Beam angle:
120°

CCT:
6500K

System Output:
1100LM

Dimensions: LxWxH
71x27x84mm

●



DLFL20

Wattage:
20W

Beam angle:
120°

CCT:
6500K

System Output:
2200LM

Dimensions: LxWxH
100x27x84mm

●



DLFL30

Wattage:
30W

Beam angle:
120°

CCT:
6500K

System Output:
3300LM

Dimensions: LxWxH
140x26x104mm

●



DLFL50

Wattage:
50W

Beam angle:
120°

CCT:
6500K

System Output:
5500LM

Dimensions: LxWxH
180x29x139mm

●



DLFL100

Wattage:
100W

Beam angle:
120°

CCT:
6500K

System Output:
11000LM

Dimensions: LxWxH
264x32x192mm

●

WALL LIGHTS



LBLW13021

Wattage:
12W

CCT: 3CCT
2700/4000/6500K

System Output:
1000LM @2700K

Dimensions: DxWxH
Ø100x122x183mm

○ ●



LBLW13022


Wattage:
2 x 12W

CCT: 3CCT
2700/4000/6500K

System Output:
2 x 1000LM @2700K

Dimensions: DxWxH
Ø100x122x264mm

○ ●



LBLW13232

Wattage:
2 x 5W

CCT: 3CCT
2700/4000/6500K

System Output:
2 x 530LM @2700K

Dimensions: LxWxH
175x30x90mm

○ ●



LBLW13332

Wattage:
6 x 1W

CCT: 3CCT
2700/4000/6500K

System Output:
600LM @2700K

Dimensions: LxWxH
170x37x80mm

○ ●



LBLW13142

Wattage:
9W

CCT: 3CCT
2700/4000/6500K

System Output:
1145LM @2700K

Dimensions:
Ø180x45mm

○ ●



ML-VW-6W/12W

Wattage:
6/12W

Beam angle:
120°

CCT: 3CCT
3000/4000/6500K

System Output:
500LM @3000K 6W
800LM @3000K 12W

Dimensions: LxWxH
175x28x90mm

○ ●

GU10



LWL15GU10

Wattage:
GU10 7.5W Max

Dimensions: LxWxH
82x116x90mm

○ ● ○ ●



LWL152GU10

Wattage:
GU10 7.5W Max

Dimensions: LxWxH
85x180x120mm

○ ● ○ ●



LWL16GU10

Wattage:
GU10 7.5W Max

Dimensions: DxWxH
Ø90x147x120mm

○ ● ○ ●



LWL162GU10

Wattage:
GU10 7.5W Max

Dimensions: LxWxH
Ø90x147x215mm

○ ● ○ ●



LLEDBH01

Wattage:
12/18W

Beam angle:
120°

CCT:
3000/4000K

System Output:
2016LM @3000K 12W
2180LM @4000K 12W
2775LM @3000K 18W
3000LM @4000K 18W

Dimensions: LxWxH
270x270x80mm



LLEDBH02

Wattage:
11/16W

Beam angle:
120°

CCT:
3000/4000K

System Output:
1585LM @3000K 11W
1701LM @4000K 11W
2162LM @3000K 16W
2321LM @4000K 16W

Dimensions: LxWxH
Ø276x110mm



LLEDBH06

Wattage:
8.8/12W

Beam angle:
120°

CCT:
3000/4000K

System Output:
640LM @3000K 8.8W
910LM @3000K 12W
950LM @4000K 12W

Dimensions: LxWxH
Ø176x55mm
Ø211x55mm



LBLLANT01

Wattage:
E27 60W

Dimensions: LxWxH
200x145x430mm



LBLLANT02

Wattage:
E27 60W

Dimensions: LxWxH
340x300x500mm



LBLLANT03

Wattage:
GU10 50W

Dimensions: LxWxH
155x155x425mm



LBLLANT04

Wattage:
E27 60W

Dimensions: LxWxH
160x150x500mm




LBLLANT05

Wattage:
E27 60W

Dimensions: LxWxH
160x150x500mm



FOOTLIGHTS



LBLW13421

Wattage:
5W

Beam angle:
115°

CCT: 3CCT
3000/4000/6500K

System Output:
350LM @3000K
435LM @4000K
425LM @6500K

Dimensions: LxWxH
100x34x88



LFL04

Wattage:
2/3.8/5W

Beam angle:
60°

CCT: 3CCT
3000/4000/6500K

System Output:
100LM @3000K 2W
200LM @3000K 3.8W
250LM @3000K 5W

Dimensions: LxWxH
100x33x60mm
160x33x70mm
220x33x80mm



LF417214


Wattage:
4W

Beam angle:
F (143°27'-42°)

CCT:
3000K

System Output:
30LM @3000K

Dimensions: LxWxH
225x49x60mm



LF417014

Wattage:
4.2W

Beam angle:
F (102°59'-40°)

CCT:
3000K

System Output:
110LM @3000K

Dimensions: LxWxH
130x130x61mm



LF430717


Wattage:
2.6W

Beam angle:
P (6°61'-29°)

CCT:
3000K

System Output:
10LM @3000K

Dimensions: LxWxH
47x55x212mm



LF413914

Wattage:
5.1W

Beam angle:
P (79°69'-41°)

CCT:
3000K

System Output:
215LM @3000K

Dimensions: LxWxH
85x95x105mm



BOLLARDS

COMMERCIAL

			
LF725214	LF724414	LBOL13214030	LEDPOST
Wattage: 17W	Wattage: 7.7W	Wattage: 21W	Wattage: 19W
Beam angle: 180°	Beam angle: 180°	Beam angle: 120°	Beam angle: 120°
CCT: 3000K	CCT: 3000K	CCT: 4000K	CCT: 4000K
System Output: 600LM @3000K	System Output: 291LM @3000K	System Output: 3020LM @4000K	System Output: 2920LM @4000K
Dimensions: Ø210x300mm Ø210x600mm Ø210x900mm	Dimensions: Ø105x300mm Ø105x600mm Ø105x900mm	Dimensions: Ø168x915mm ● ● ◐	Dimensions: Ø137x900mm ● ◐
● ●	● ●		

BURIED UPLIGHTS

COMMERCIAL & ARCHITECTURAL

		
LF656617	LF605815	LF667317
Wattage: 2.6W	Wattage: 7W	Wattage: 1.8W
Beam angle: 15°/30°	Beam angle: 15°/24°/30°	Beam angle: Radial
CCT: 3000K	CCT: 3000K	CCT: 3000K
System Output: 119LM @3000K	System Output: 332LM @3000K	System Output: 24LM @3000K
Dimensions: Ø72x78mm ●	Dimensions: Ø100x100mm ●	Dimensions: Ø55x65.8mm ●





GARDEN SPIKES & SPOTS

COMMERCIAL & ARCHITECTURAL

				
LLEDS02-3	GS012	LF701011	LF727715	LF732715
Wattage: GU10 5.3W	Wattage: GU10 7W	Wattage: 2.6W	Wattage: 15W	Wattage: 26W
Dimensions: Ø75x400mm ●	Dimensions: Ø60x110mm ●	Beam angle: 15°/30°	Beam angle: 30°	Beam angle: 36°
		CCT: 3000/4000K	CCT: 3000/4000K	CCT: 3000K
		System Output: 127LM @3000K	System Output: 479LM @3000K	System Output: 1870LM @3000K
		Dimensions: DxWxH Ø24x92x45mm ●	Dimensions: Ø100x105mm ●	Dimensions: Ø102x147mm ●

WALL WASHERS & SPECIAL EFFECTS

COMMERCIAL & ARCHITECTURAL

			
LF816316	BU23	BLADE S	GLFOP0.75
Wattage: 10.8/21.6/30.4W	Wattage: 11W	Wattage: 3W	Wattage: 3W
Beam angle: 22°	Beam angle: 360°	Beam angle: 2x180°	CCT: 4000K
CCT: 2700/3000/4000K	CCT: 3000K	CCT: 2700/3000/4000K	Dimensions: LxWxH 154x92x125mm ●
System Output: 880LM @2700K 10.8W 1419LM @2700K 21.6W 1714LM @2700K 30.4W	System Output: 528LM @3000K	System Output: 150LM @2700K	
Dimensions: LxWxH 500x40x74mm ●	Dimensions: Ø160x85mm ○ ○ ●	Dimensions: LxWxH 110x70x40mm ●	

EMG

EXIT SIGNS, LIGHTS & BATTERY PACKS



LEMGE03

Voltage:
230V

Duration:
3hours

Dimensions: LxWxH
430x45x215mm




LEMGE04

Wattage:
15W

Duration:
2hours

Dimensions: LxWxH
310x65x310mm



RCN4STO-01


Wattage:
2.4W

Beam angle:
120°

CCT:
6500K

System Output:
320LM @6500K

Dimensions:
Ø75x30mm



LEDUNIVERSE

Voltage:
110-250V

Charging time:
24H

Max casing temp:
70°C

Dimensions: LxWxH
170x45x35mm



LEDUNIVERSEDELTA

Voltage:
110-253V

Charging time:
24H

Max casing temp:
70°C

Dimensions: LxWxH
170x45x35mm

SENSORS



**Day/Night
SENSORS**

Voltage:
220-240V

Dimensions: DxWxH
Ø58x60x135mm



CD-IR-HB

Voltage:
230V

Time-out range:
5s-8Min



ALC15

Voltage:
230V

Time-out range:
0s-16H

Dimensions: LxWxH
95x54x95mm



EBDHS

Voltage:
230V

Time-out range:
5s-8Min

Dimensions:
Ø88x112mm



EBDSM

Voltage:
230V

Time-out range:
10s-99Min

Dimensions:
Ø49x50mm



EBDSPIR

Voltage:
230V

Time-out range:
10s-99Min

Dimensions:
Ø76x69mm



EBMPIR-MB

Voltage:
230V

Time-out range:
10s-99Min

Dimensions: LxWxH
114x28x38mm



GEFL

Voltage:
230V

Time-out range:
10s-30Min

Dimensions:
Ø76x69mm



GESM

Voltage:
230V

Time-out range:
10s-30Min

Dimensions:
Ø96.5x50mm



MWS3A

Voltage:
230V

Time-out range:
10s-99Min

Dimensions:
Ø85x92mm



MWS6-UHS5

Voltage:
230V

Time-out range:
10s-99Min

Dimensions:
Ø76x73mm



UNLCDHS

Range:
8-25M

Dimensions: LxWxH
94x25x160mm



UHS5

Range:
7M

Dimensions: LxWxH
67x4x86mm

DESIGN & TECHNICAL CERTAINTY

