



LIGHTS BY
LINEA

EST. 1990

DEVELOPMENTS

BROCHURE

Our Mission Statement



Lighting Beyond Illumination

We craft innovative lighting design solutions that don't just light spaces — they transform them.

From concept to specification, we ensure the right product for every project, achieving your vision with precision and style.

Competitive pricing. On-time delivery. Uncompromising quality.

Technical Information & Symbol Descriptions





CEILING

CEILING LIGHTS

COMMERCIAL & ARCHITECTURAL



3CCT PANEL

Wattage:
18W

Beam Angle:
120°

CCT: 3CCT
3000/4000/6000K

System Output:
1700LM @3000K

Dimensions:
Ø230x25mm



3CCT PANEL

Wattage:
24W

Beam Angle:
120°

CCT: 3CCT
3000/4000/6000K

System Output:
2400LM @3000K

Dimensions:
Ø230x25mm



3CCT PANEL

Wattage:
18W

Beam Angle:
120°

CCT: 3CCT
3000/4000/6000K

System Output:
1700LM @3000K

Dimensions:
Ø230x25mm



3CCT PANEL

Wattage:
24W

Beam Angle:
120°

CCT: 3CCT
3000/4000/6000K

System Output:
2400LM @3000K

Dimensions:
Ø230x25mm



SURFACE DOWNLIGHTS

GU10



LSD17GU10

Wattage:
GU10 7.5W Max

Dimensions:LxWxH
80x80x90mm



LSD18GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø80x90mm



LSD172GU10

Wattage:
GU10 7.5W Max

Dimensions:LxWxH
160x80x90mm



SURFACE SPOTS

GU10



LSS052GU1031

Wattage:
GU10 7.5W Max

Dimensions: LxHxD
336x96xØ60mm



LSS053GU10

Wattage:
GU10 7.5W Max

Dimensions: LxHxD
560x98xØ60mm



LSS04GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x98mm



LSS06GU10


Wattage:
GU10 7.5W Max

Dimensions:
Ø60x98mm



PENDANTS

ARCHITECTURAL



LF327419


Wattage:
34W

Beam angle:
180°

CCT:
3000K

System Output:
1451LM

Dimensions:LxWxH
1552x15x16mm



LF326211


Wattage:
7.1W

Beam angle:
19°

CCT:
3000K

System Output:
446LM

Dimensions:
Ø25x350mm
Ø25x550mm
Ø25x750mm



LF334417

Wattage:
4.2W

Beam angle:
12°

CCT:
3000K

System Output:
28LM

Dimensions:
Ø32x203mm
Ø32x303mm
Ø32x403mm



P472

Wattage:
60W

Beam angle:
Lamp dependant

CCT:
3000K

System Output:
Lamp dependant

Dimensions:
Ø260x125mm



P488

Wattage:
60W

Beam angle:
Lamp dependant

CCT:
3000K

System Output:
Lamp dependant

Dimensions:
Ø160x305mm





P1015B

Wattage:
60W

Beam angle:
Lamp dependant

CCT:
3000K

System Output:
Lamp dependant

Dimensions:
Ø280x335mm



P1304

Wattage:
40W

Beam angle:
Lamp dependant

CCT:
3000K

System Output:
Lamp dependant

Dimensions:
Ø300x1100mm



P1278N

Wattage:
60W

Beam angle:
Lamp dependant

CCT:
3000K

System Output:
Lamp dependant

Dimensions:
Ø400x400mm



P1301CH

Wattage:
5W

Beam angle:
Diffuse illumination

CCT:
3000K

System Output:
270LM

Dimensions:
Ø140x1500mm




1-CIRCUIT 3-WIRE TRACK




LBLT3

Dimensions: LxWxH
1000x35x16mm



LBLT3PF
POWER FEED



LBLT3IJ
I-JOINER




LBLT3IC
I-CONNECTOR



LBLT3LC
L-CONNECTOR



LBLT3TC
T-CONNECTOR




LBLT3XC
X-CONNECTOR



LBLT3FC
FLEXI CONNecTOR



LBLT3TA
TRACK ADAPTOR



LBLT3ST
SUSPENSION TRACK



LBLT3STK
SUSPENSION KIT

3-CIRCUIT TRACK SPOTS

GU10



LTL35GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x98mm



LTL35GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x98mm



UTILITY LIGHTS

COMMERCIAL & ARCHITECTURAL



LLEDB11

Wattage:
36/55/75W

Beam angle:
120°

CCT:
4000K

System Output:
4000LM @4000K 36W
6000LM @4000K 55W
9500LM @4000K 75W

Dimensions: LxWxH
1133x63x76mm
1415x63x76mm
1697x63x76mm



LLEDTP03

Wattage:
50W

Beam angle:
120°

CCT:
4000K

System Output:
5500LM @4000K

Dimensions: LxWxH
1500x50x55mm



LLEDVP05

Wattage:
20-35W

Beam angle:
120°

CCT: 3CCT
4000/5000/6500K

System Output:
3750LM @4000K 20W
5250LM @4000K 35W

Dimensions: LxWxH
1200x80x72mm
1500x80x72mm



RECESSED DOWNLIGHTS



LRD28

Wattage:
12W

Beam angle:
120°

CCT: 3CCT
3000/4000/6000K

System Output:
1380LM @3000K

Dimensions:
Ø75x42mm



LRD71

Wattage:
10/18/24W

Beam angle:
120°

CCT: 3CCT
3000/4000/6000K

System Output:
1000LM @3000K 10W
1800LM @3000K 18W
2400LM @3000K 24W

Dimensions:
Ø140x28mm
Ø190x28mm
Ø230x28mm



LRD72

Wattage: selectable
18/24W or 26/35W

Beam angle:
60°

CCT: 3CCT
3000/4000/6000K

System Output:
2160LM @3000K 18W
2880LM @3000K 24W
3120LM @3000K 26W
4200LM @3000K 35W

Dimensions:
Ø165x60mm
Ø220x66.5mm



LRD73

Wattage:
7W

Beam angle:
36°

CCT:
3000/4000K

System Output:
560LM @3000K

Dimensions:
Ø63x45mm



LRD73

Wattage:
12W

Beam angle:
36°

CCT:
3000/4000K

System Output:
960LM @3000K

Dimensions:
Ø79x49mm



LRD73

Wattage:
18W

Beam angle:
36°


CCT:
3000/4000K

System Output:
1440LM @3000K

Dimensions:
Ø94x52mm



ARCHITECTURAL



LRD23GU1031

Wattage:
GU10 7.5W Max

Dimensions:
Ø92x28mm



LRD23GU10AD

Wattage:
GU10 7.5W Max

Dimensions:
Ø92x28mm



LRD23GU10IP

Wattage:
GU10 7.5W Max

Dimensions:
Ø85x50mm



LRD36

Wattage:
GU10 7.5W Max

Dimensions:
Ø92x46mm



LRD52

Wattage:
GU10 7.5W Max

Dimensions:
Ø85x44mm



GU10



LRD67

Wattage:
GU10 4.5W Max

Dimensions:
Ø66x35mm



WALL BEDSIDE LIGHTING



LWL25GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x105mm



LWL26GU10

Wattage:
GU10 7.5W Max

Dimensions:
Ø60x105mm




COMMERCIAL & ARCHITECTURAL




STRIPS

PROFILES & DIFFUSERS




LBLEXTA4

Dimensions: LxWxH
2000x23.1x7mm




LBLEXTA6

Dimensions: LxWxH
2000x17.5x7mm




LBLEXTA11

Dimensions: LxWxH
2000x17.5x15mm




LBLEXTA12B

Dimensions: LxWxH
2000x44x35mm




LBLEXTA13

Dimensions: LxWxH
2000x16x16mm




LBLEXTA18

Dimensions: LxWxH
2000x10x10mm



LBLEXTA48

Dimensions: LxWxH
2000x35x35mm



LBLEXTA54

Dimensions: LxWxH
2000x15x6.27mm




LBLEXTACLIP
END CAPS**




LBLEXTAEC
CLIPS**

CORNICES




LBLCORN1

Dimensions: LxWxH




LBLCORN2

Dimensions: LxWxH




LBLCORN3

Dimensions: LxWxH

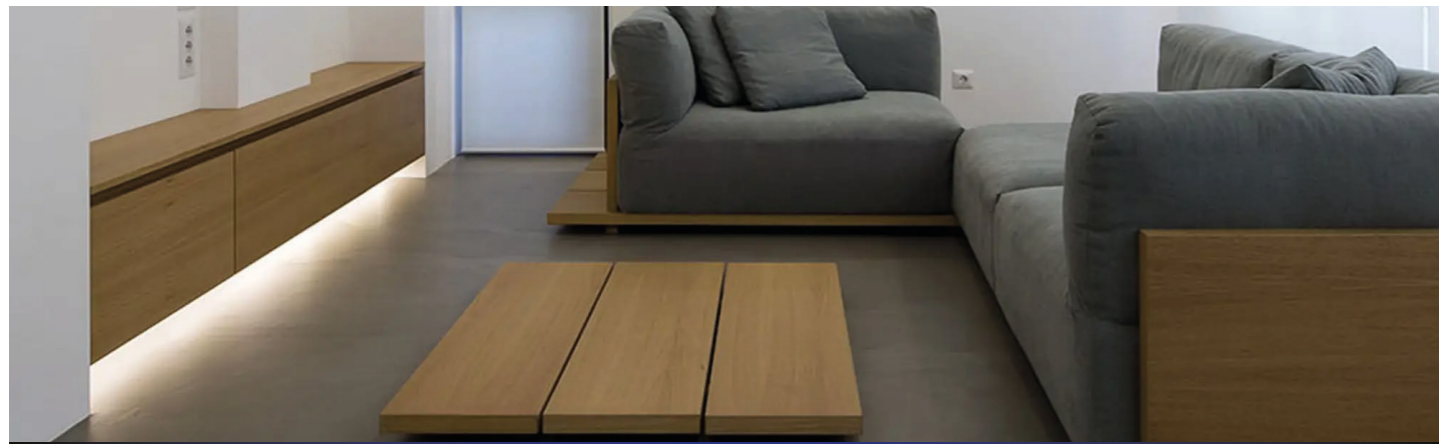

24V LED STRIPS



LBLFLEX4.8

Wattage:
4.8W

CCT:
3000/4000K

System Output:
375LM @3000K
397LM @4000K

Cut length:
100mm




LBLFLEX14.4

Wattage:
14.4W

CCT:
3000/3500/4000K

System Output:
2154LM @3000K
2278LM @3500K
2947LM @4000K

Cut length:
50mm



LBLFLEX23

Wattage:
23W

CCT:
3000/3500/4000K

System Output:
2117LM @3000K
2241LM @3500K
2419LM @4000K

Cut length:
25mm




LBLFLEX10

Wattage:
10W

CCT:
3000/4000K

System Output:
880LM @3000K
989LM @4000K

Cut length:
50mm



LBLFLEX5

Wattage:
5W

CCT:
3000K

System Output:
512LM @3000K

Cut length:
50mm



LBLFLXW14.4

Wattage:
14.4W

CCT:
3000/4000K

System Output:
2135LM @3000K
2947LM @4000K

Cut length:
25mm



LBLFLEXW1222V

Wattage:
12W

CCT:
3000K

System Output:
780LM @3000K

Cut length:
166.6mm




**LBLFLEX18
DTW224**

Wattage:
18W

CCT: (Dim to warm)
1800-3000K

System Output:
1529LM @3000K

Cut length:
62.5mm



**LBLFLEX14.4
RGB**

Wattage:
14.4W

CCT:(All colors RGB @100%)
RGB 39015.80K

System Output:
620LM

Cut length:
100mm




**LBLFLEXW14.4
RGB**

Wattage:
14.4W

CCT:(All colors RGB @100%)
RGB 42300K

System Output:
620LM

Cut length:
100mm




**LEDFLEX-
19.2CW RGB**

Wattage:
19.2W

CCT:
RGBW 4000K

System Output:
1287LM @4000K

Cut length:
62.5mm



**LEDFLEX-
19.2WW RGB**

Wattage:
19.2W

CCT:
RGBW 3000K

System Output:
1163LM @3000K

Cut length:
62.5mm




LBLNEON6	LEDNEON10	3DSILICONE-NEON	MAGICNEON-RGB	MAGICNEON SINGLE COLOR
Wattage: 6W	Wattage: 9.6W	Wattage: 10W	Wattage: 6.4/19.2W/m	Wattage: 16W/m
CCT: 3000-3500K	CCT: 2700/3000/4000/6000K	CCT: 3000/4000/6000K	CCT: RGB	CCT: 3000/4000K
System Output: 348LM @3000K	System Output: 500LM @2700K	System Output: 700LM @3000K 730LM @4000K/6000K	System Output: 108LM/m @6.4W/m 696LM/m @19.2W/m	System Output: 1457LM @3000K 1466LM @4000K
Cut length: 25mm	Cut length: 50mm	Cut length: 50mm	Cut length: 41.66mm	Cut length: 35.7mm

DRIVERS & ACCESSORIES



LED(75/150)TD24	LED(75/150)CTDALI24V	LED(75/150)ADDALI24V	LBL(75/150)WNWP24VDD	LBL(75/150)WNWP24VTD
Wattage: 75/150W	Wattage: 75/150W	Wattage: 75/150W	Wattage: 75/150W	Wattage: 75/150W
Input voltage: 220-240V	Input voltage: 220-240V	Input voltage: 0-10V/1-10V/10V PWM	Input voltage: 100-240V	Input voltage: 220-240V
Output voltage: DC24V	Output voltage: DC24V	Output voltage: DC24V	Output voltage: DC24V	Output voltage: DC24V
Dimensions: LxWxH 273x57x37mm 293x43x30mm	Dimensions: LxWxH 273x57x37mm 293x43x30mm	Dimensions: LxWxH 293x43x30mm 352x43x30mm	Dimensions: LxWxH 213x54x33mm 206x75x41mm	Dimensions: LxWxH 213x54x33mm 260x78.3x45mm

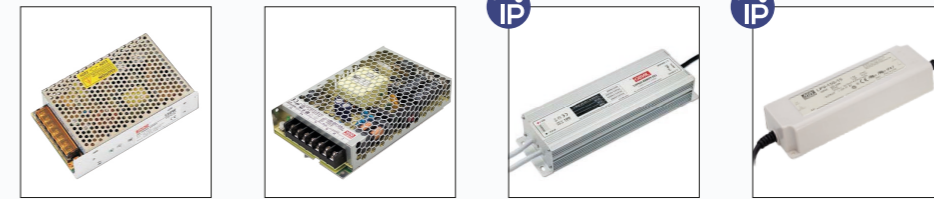

LBL(60/120/150)NWP12V	LBL(60/100/150)NWP	LBL(75/150)WP12VJ	LBL(60/150)WP24V
Wattage: 60/120/150W	Wattage: 60/100/150W	Wattage: 75/150W	Wattage: 60/150W
Input voltage: 100-250V	Input voltage: 100-250V	Input voltage: 170-250V	Input voltage: 90-370V
Output voltage: DC12/24V	Output voltage: DC12/24V	Output voltage: DC12V	Output voltage: DC12/24V
Dimensions: LxWxH 110x78x35mm 160x98x38mm	Dimensions: LxWxH 110x78x35mm 160x98x38mm	Dimensions: LxWxH 213x54x33mm 244x71x45mm	Dimensions: LxWxH 148x40x30mm 162.5x42.5x32mm 191x63x37.5mm



LBL150WNW-P24VSN	LBL75WNW-P24VSN	LBL150WNWP24
Wattage: 150W	Wattage: 75W	Wattage: 150W
Input voltage: 220-240V	Input voltage: 180-240V	Input voltage: 220-240V
Output voltage: 24V	Output voltage: 24V	Output voltage: 24V
Dimensions: LxWxH 320x30x18.2mm	Dimensions: LxWxH 304.6x30x16.7mm	Dimensions: LxWxH 336.6x30x18.2mm



LEDCTMM1	LEDCTMM8
Wattage: 108/216W	Wattage: 100/240/480W
Input voltage: 12-24V	Input voltage: 220-240V
Output voltage: DC12/24V	Output voltage: DC5/12/24V
Dimensions: LxWxH 104x60x90mm	Dimensions: LxWxH 104x58x90mm



LBLPANEX5

Input voltage:
100-240V

Ouput voltage:
DC5/12/24V

Dimensions: LxWxH
86x86x36mm



LBLPANEX8S-ROBW

Input voltage:
100-240V

Ouput voltage:
DC5/12/24V

Dimensions: LxWxH
86x86x36mm



LBLPANBLE-UB-1DIM

Input voltage:
120-240V

Ouput voltage:
DC5/12/24V

Dimensions: LxWxH
451x75x30mm



LBLPANBLEU-B4ROBW

Input voltage:
120-240V

Ouput voltage:
DC5/12/24V

Dimensions: LxWxH
451x75x30mm



P410ARC
SUSPENSION
CABLES



LBLMSWITCH
MAGNETIC
SWITCH



CD_IR-MS
MINI PIR SWITCH



LBLQUICKCON-
NECTM/F
QUICK CONNEC-
TORS

OUTDOOR

POST TOPS



LLEDPT01

Wattage:
30/42W

Beam angle:
Symmetrical

CCT:
4000/5000K

System Output:
5040LM @4000K 30W
7056LM @4000K 42W

Dimensions:
Ø467x350mm



LLEDPT02

Wattage:
28W

Beam angle:
Symmetrical

CCT:
3000/4000/5000K

System Output:
4088LM @4000K

Dimensions:
Ø473x370mm



LLEDPT06

Wattage:
20/37/40/75W

Beam angle:
Asymmetric

CCT:
3000/4000K

System Output:
2184LM @3000K 20W
4280LM @3000K 37W
2 x 2184LM @3000K 40W
2 x 4280LM @3000K 75W

Dimensions: LxWxH
575x160x60mm



LEDSHINE

Wattage:
19/38W

Beam angle:
Louvre

CCT:
3000/4000K

System Output:
2041LM @3000K 19W
4082LM @3000K 38W

Dimensions:
Ø545x564mm



FLOODLIGHTS



DLFL10

Wattage:
10W

Beam angle:
120°

CCT:
6500K

System Output:
1100LM

Dimensions: LxWxH
71x27x84mm



DLFL20

Wattage:
20W

Beam angle:
120°

CCT:
6500K

System Output:
2200LM

Dimensions: LxWxH
100x27x84mm



DLFL30

Wattage:
30W

Beam angle:
120°

CCT:
6500K

System Output:
3300LM

Dimensions: LxWxH
140x26x104mm



DLFL50

Wattage:
50W

Beam angle:
120°

CCT:
6500K

System Output:
5500LM

Dimensions: LxWxH
180x29x139mm



DLFL100


Wattage:
100W

Beam angle:
120°

CCT:
6500K

System Output:
11000LM

Dimensions: LxWxH
264x32x192mm

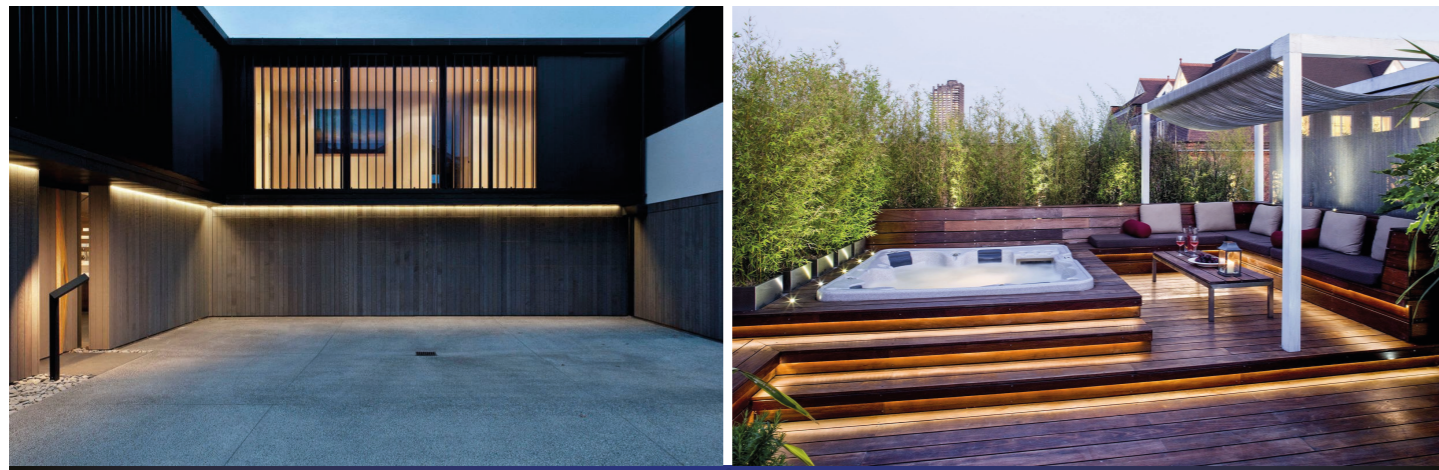

BULKHEADS

COMMERCIAL & ARCHITECTURAL

 <p>LLEDBH02</p> <p>Wattage: 11/16W</p> <p>Beam angle: 120°</p> <p>CCT: 3000/4000K</p> <p>System Output: 1585LM @3000K 11W 2162LM @3000K 16W 1701LM @4000K 11W 2321LM @4000K 16W</p> <p>Dimensions: LxWxH Ø276x110mm</p> <p>○ ●</p>	 <p>LLEDBH03</p> <p>Wattage: 16W</p> <p>Beam angle: 120°</p> <p>CCT: 3000/4000K</p> <p>System Output: 2484LM @3000K 2700LM @4000K</p> <p>Dimensions: LxWxH Ø270x100mm</p> <p>○ ●</p>	 <p>LLEDBH04</p> <p>Wattage: 16W</p> <p>Beam angle: 120°</p> <p>CCT: 3000/4000K</p> <p>System Output: 2484LM @3000K 2700LM @4000K</p> <p>Dimensions: LxWxH 265x265x65mm</p> <p>○ ●</p>	 <p>LLEDBH06</p> <p>Wattage: 8.8/12W</p> <p>Beam angle: 120°</p> <p>CCT: 3000/4000K</p> <p>System Output: 640LM @3000K 8.8W 910LM @3000K 12W 950LM @4000K 12W</p> <p>Dimensions: Ø176x55mm Ø211x55mm</p> <p>○ ●</p>
---	--	--	--

WALL LIGHT

GUIO & INTEGRATED


 <p>LWL15GU10</p> <p>Wattage: GU10 7.5W Max</p> <p>Dimensions: LxWxH 82x116x90mm</p> <p>○ ● ○ ●</p>	 <p>LWL152GU10</p> <p>Wattage: GU10 7.5W Max</p> <p>Dimensions: LxWxH 85x180x120mm</p> <p>○ ● ○ ●</p>	 <p>LWL16GU10</p> <p>Wattage: GU10 7.5W Max</p> <p>Dimensions: DxWxH Ø90x147x120mm</p> <p>○ ● ○ ●</p>	 <p>LWL162GU10</p> <p>Wattage: GU10 7.5W Max</p> <p>Dimensions: DxWxH Ø90x147x215mm</p> <p>○ ● ○ ●</p>	 <p>L367</p> <p>Wattage: GU10 5.5W Max</p> <p>Dimensions: LxWxH 92x68x80mm</p> <p>○ ● ○</p>
---	---	---	---	---

GUIO & INTEGRATED

 <p>L365</p> <p>Wattage: 5W</p> <p>CCT: 3000/4000K</p> <p>System Output: 380LM @3000K 400LM @4000K</p> <p>Dimensions: LxWxH 92x68x80mm</p> <p>○ ● ○</p>	 <p>S45491</p> <p>Wattage: 12W</p> <p>CCT: 3000/4000K</p> <p>System Output: 700LM @3000K</p> <p>Dimensions: LxWxH 200x40x125mm</p> <p>○ ●</p>	 <p>4549.2.4030</p> <p>Wattage: 6W</p> <p>CCT: 3000/4000K</p> <p>System Output: 480LM @3000K</p> <p>Dimensions: LxWxH 240x40x80mm</p> <p>○ ●</p>
---	---	--


FOOTLIGHTS

COMMERCIAL & ARCHITECTURAL

 <p>LF417214</p> <p>Wattage: 4W</p> <p>CCT: 3000K</p> <p>System Output: 30LM @3000K</p> <p>Dimensions: LxWxH 225x49x60mm</p> <p>● ○ ●</p>	 <p>LF417014</p> <p>Wattage: 4.2W</p> <p>CCT: 3000K</p> <p>System Output: 110LM @3000K</p> <p>Dimensions: LxWxH 130x130x61mm</p> <p>●</p>	 <p>LFL042CCT30</p> <p>Wattage: 2W</p> <p>CCT: 3CCT 3000/4000/6500K</p> <p>System Output: 100LM @3000K</p> <p>Dimensions: LxWxH 100x133x60mm</p> <p>○ ● ○</p>	 <p>LFL044CCT</p> <p>Wattage: 3.8W</p> <p>CCT: 3CCT 3000/4000/6500K</p> <p>System Output: 200LM @3000K</p> <p>Dimensions: LxWxH 160x33x70mm</p> <p>○ ● ○</p>	 <p>LFL045CCT</p> <p>Wattage: 5W</p> <p>CCT: 3CCT 3000/4000/6500K</p> <p>System Output: 250LM @3000K</p> <p>Dimensions: LxWxH 220x36x80mm</p> <p>○ ● ○</p>
---	---	---	--	--

BOLLARDS

COMMERCIAL



LF725214

Wattage: 17W
 Beam angle: 180°
 CCT: 3000K
 System Output: 600LM @3000K
 Dimensions: Ø210x300mm
 Ø210x600mm
 Ø210x900mm



LF724414

Wattage: 7.7W
 Beam angle: 180°
 CCT: 3000K
 System Output: 291LM @3000K
 Dimensions: LxWxH
 Ø105x300mm
 Ø105x600mm
 Ø105x900mm



LBOL13214030

Wattage: 21W
 Beam angle: 120°
 CCT: 4000K
 System Output: 3020LM @4000K
 Dimensions: Ø168x915mm



LEDPOST

Wattage: 19W
 Beam angle: 120°
 CCT: 4000K
 System Output: 2920LM @4000K
 Dimensions: Ø137x900mm


GARDEN SPIKES & SPOTS

COMMERCIAL & ARCHITECTURAL



LLEDS02-3

Wattage: GU10 5.5W
 Dimensions: Ø75x400mm



GS012

Wattage: GU10 7W Max
 Dimensions: Ø60x110mm



LF701011

Wattage: 2.6W
 Beam angle: 15°/30°
 CCT: 3000/4000K
 System Output: 127LM @3000K
 Dimensions: DxWxH
 Ø24x92x45mm



LF727715

Wattage: 15W
 Beam angle: 30°
 CCT: 3000/4000K
 System Output: 997LM @3000K
 Dimensions: Ø100x105mm





EMG

EMERGENCY EXIT SIGNS

COMMERCIAL & ARCHITECTURAL



LEMGE03

Voltage:
230V

Duration:
3hours

Dimensions: LxWxH
430x45x215mm



LEMGE04

Wattage:
15W

Duration:
2hours

Dimensions: LxWxH
310x65x310mm



DESIGN & TECHNICAL CERTAINTY

