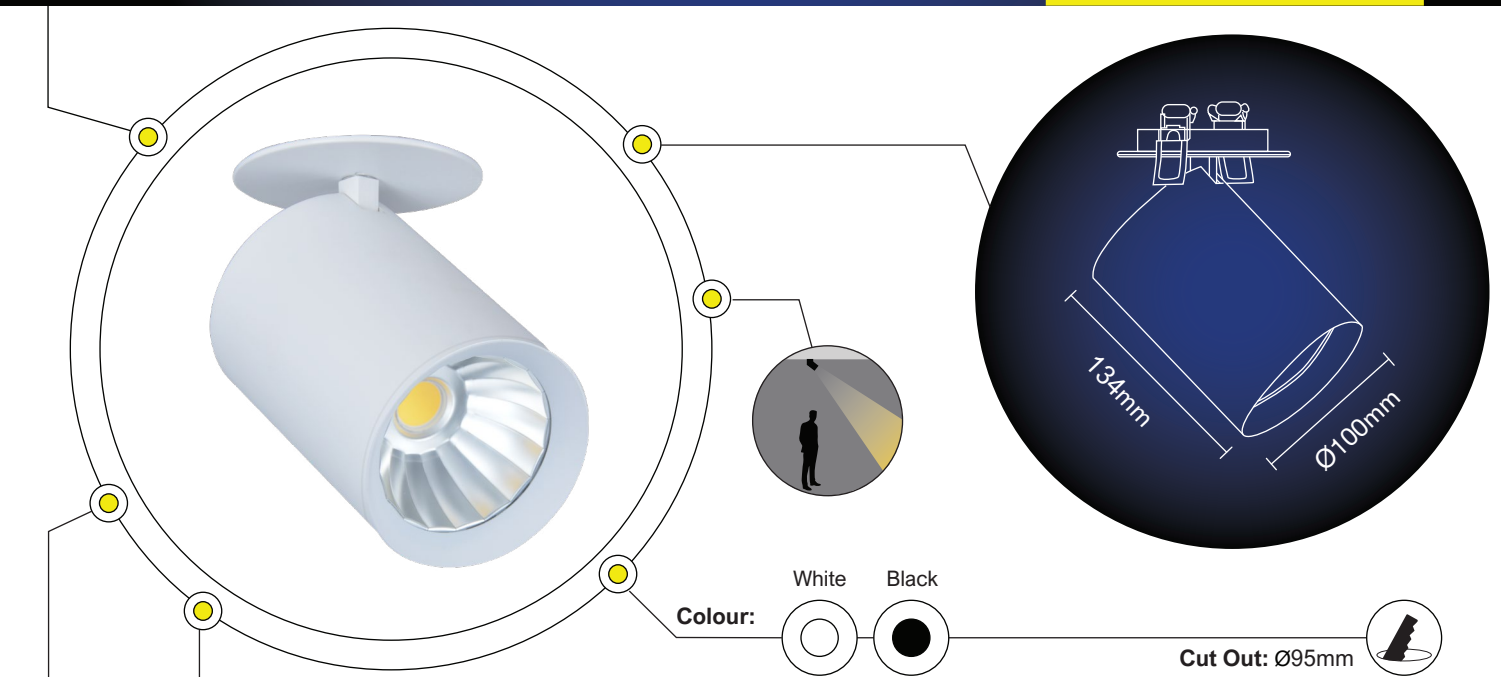


+IP
20

LOA

✓
5 YRS

ldt

PHYSICAL DATA

FEATURES

- Structure: Aluminum
- LED Chip: Bridgelux
- Driver: KGP
- Do not fit the device in a closed, non-ventilated environment

MOUNTING

Recessed

APPLICATION AREAS

Indoor, Commercial, Residential, Retail

OPTIONS & ACCESSORIES

- Dimming: on/off, Triac, 0-10V, DALI
- Reflector

TECHNICAL DATA

LRS07383CCT

LAMP	LED
TOTAL POWER (W)	40W
SYSTEM OUTPUT (LM)	4600LM / 4800LM / 5000LM
CCT (K)	3000K / 3500K / 4000K
CRI (Ra)	90
BEAM ANGLE	15° / 24° / 36° / 45° / 60°


OPERATING VOLTAGE-VAC	220 - 240V
OPERATING TEMP °C	-20 TO 45°C
CURRENT (MA)	1050MA
RATED LIFE (HRS)	50 000HRS
FLICKER LEVEL	FLICKER-FREE
POWER FACTOR	0.95
WEIGHT (KG)	0.9KG
DIMENSIONS	D:Ø100 x L:134mm
CUT OUT	D:Ø95mm

CD / KLM

C0 - C180

C90 - C270

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



E&OE MAY OCCUR



LIGHTS BY
LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

Cape Town | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com