

- +IP 20
-
-
-

PHYSICAL DATA

FEATURES

- Material: Aluminum with PMMA diffuser
- Modular structure, easy for driver replacement
- 1.5mm profile thickness
- Available in single and continuous linear, easy for connection & maintenance
- 3CCT selectable

OPTIONS & ACCESSORIES

- Dimming: On/Off DALI
- Suspension accessories and extra 2.4m rollable diffuser
- Available in 3 lengths: 1200mm / 1500mm / 3000mm

- Direct lighting wattages: 25W / 30W / 60W
- Aluminum end cap

MOUNTING

Surface or Suspended


APPLICATION AREAS

Indoor, Commercial, Residential, Retail

TECHNICAL DATA

LSL12252CCT

| | |
|-----------------------|------------------------|
| LAMP | LED |
| TOTAL POWER (W) | 25W |
| SYSTEM OUTPUT (LM) | 3200LM |
| EFFICACY (LM/W) | 130LM/W |
| CCT (K) | 3000K / 3500K / 4000K |
| CRI (Ra) | 90 |
| BEAM ANGLE | 110° |
| OPERATING VOLTAGE-VAC | 220 - 240V |
| OPERATING TEMP °C | -20°C To 40°C |
| RATED LIFE (HRS) | 50 000HRS L90B10 |
| THD | <20% |
| MAC ADAM STEP | SDCM <3 |
| WEIGHT (KG) | 3.5KG |
| DIMENSIONS | W:60 x L:1200 x H:80mm |

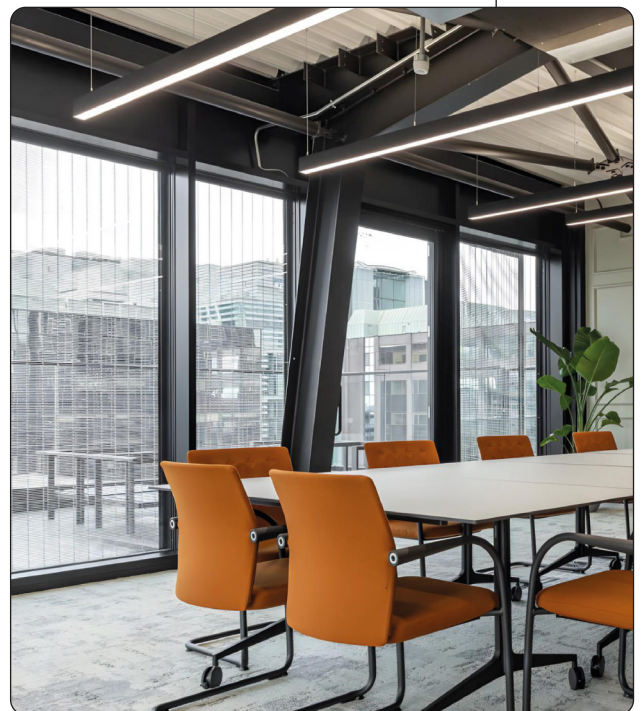

LIGHTS BY LINEA

EST. 1990

DESIGN & TECHNICAL CERTAINTY

E&OE MAY OCCUR