

Colour: White



PHYSICAL DATA

FEATURES & ACCESSORIES

- The M4-5A controller is an RGBW 4 x 5A controller
- This product comes in a set and includes the M4-5A Controller and the M8 Remote
- It works on both 12V and 24V
- Can run roughly 7 meters of 12V 19.2W RGBW strip and 15 meters of 24V 19.2W RGBW strip
- Protection includes: Reverse Polarity, LED Output Short, Overload and Restart after Protection
- It remembers its settings in case of power failure!

OPTIONS & ACCESSORIES

- M4-5A Controller and the M8 Remote available separately

MOUNTING

Surface


APPLICATION AREAS

LED Lighting Applications

TECHNICAL DATA

LEDCTMM8

MATERIAL	PLASTIC
TYPE	RGBW DIMMER
OUTPUT POWER	100W @ 5V 240W @ 12V 480W @ 24V
INPUT VOLTAGE	5 - 24V DC
OUTPUT CURRENT (MA)	5000MA
AMPERE (A)	20A (5A x 4CH)
LED OUTPUTS	4
RECEIVER MODEL	M4-5A
REMOTE WORKING VOLTAGE	DC3V (Battery CR2032)
CONTROL OUTPUT SIGNAL	RF, PWM-CV
CONTROL	BUTTONS CONTROL PANEL
FREQUENCY	433.92 MHz
REMOTE DISTANCE	40m
CONTROL ZONES	1
NUMBER OF CHANNELS	4
FUNCTIONS	PROGRAMMABLE
REMOTE MODEL	M4/M8
OPERATING TEMPERATURE	-30°C TO 55°C
WEIGHT (KG) - CONTROLLER	0.42KG
WEIGHT (KG) - REMOTE	0.125KG
DIMENSIONS - CONTROLLER	L:135 x W:30 x H:20mm
DIMENSIONS - REMOTE	L:104 x W:58 x H:90mm

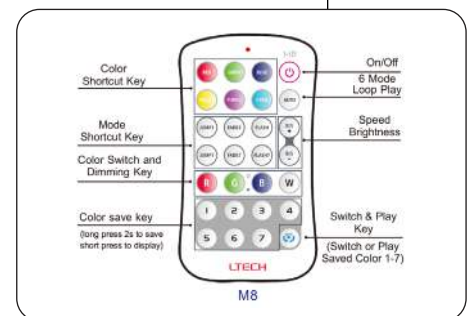

E&OE MAY OCCUR

